



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
LED SMD 2835/3030;
Nominal Size: 2X2、1X4、2X4.

SPECIFICATION

Aluminum frame, sheet metal housing;
High-diffusion light-milky PS diffuser;
Fully recessed luminaire fits standard T-Grid ceilings.


OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Photocatalyst version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital

LED PANEL

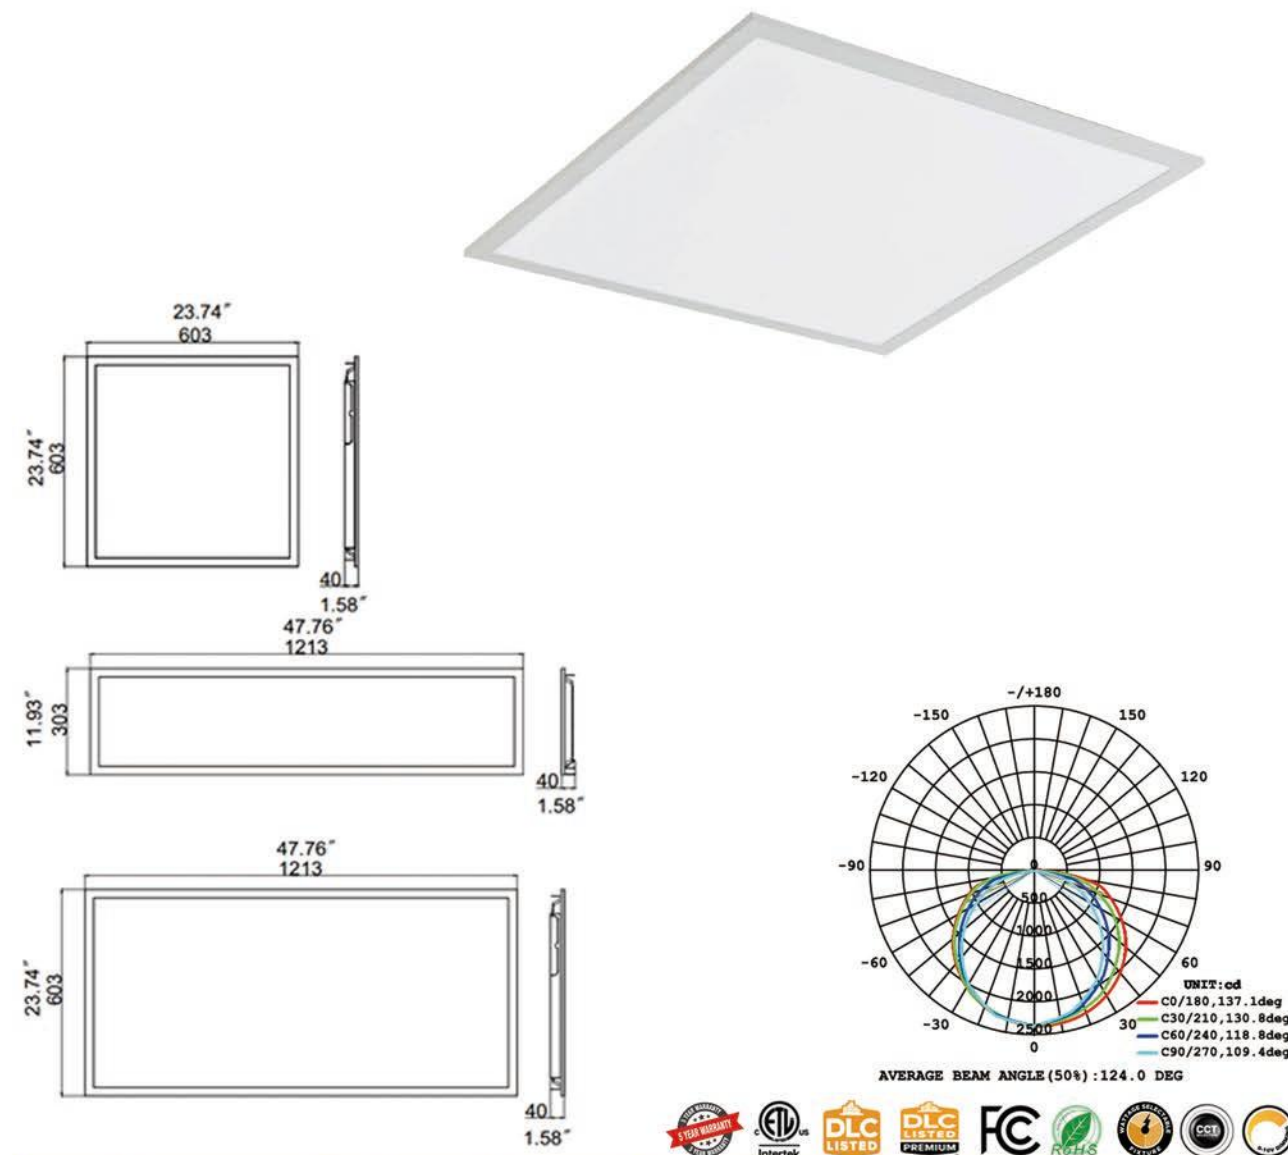

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMMABLE	FUNCTION
VP1	EY-001C-040-3CCT	2x2	20/30/40W	2200-4400Lm	110	110°	3500K-4000K-5000K	>80	0-10V	/
	EY-002C-040-3CCT	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT	2x4	30/40/50W	3300-5500Lm	110					
VP2	EY-001C-040-3CCT-P	2x2	20/30/40W	2200-4400Lm	110					Radar/microwave/infrared sensing
	EY-002C-040-3CCT-P	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT-P	2x4	30/40/50W	3300-5500Lm	110					
VP3	EY-001C-040-3CCT-H	2x2	20/30/40W	3300-6600Lm	150					High efficiency
	EY-002C-040-3CCT-H	1x4	20/30/40W	3300-6600Lm	150					
	EY-003C-050-3CCT-H	2x4	30/40/50W	4950-8250Lm	150					
VP4	EY-001C-040-3CCT-C	2x2	20/30/40W	2200-4400Lm	110					Photocatalyst
	EY-002C-040-3CCT-C	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT-C	2x4	30/40/50W	3300-5500Lm	110					
VP5	EY-001C-040-3CCT-S	2x2	20/30/40W	2200-4400Lm	110		3500-5000k	>90	APPS	Intelligent interconnection
	EY-002C-040-3CCT-S	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT-S	2x4	30/40/50W	3300-5500Lm	110					

LED TROFFER



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
LED SMD 2835/3030;
Nominal Size: 2X2、2X4.

SPECIFICATION


Sheet metal housing;
High-diffusion light-milky PS diffuser;
Fully recessed luminaire fits standard T-Grid ceilings.

OPTION





Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital

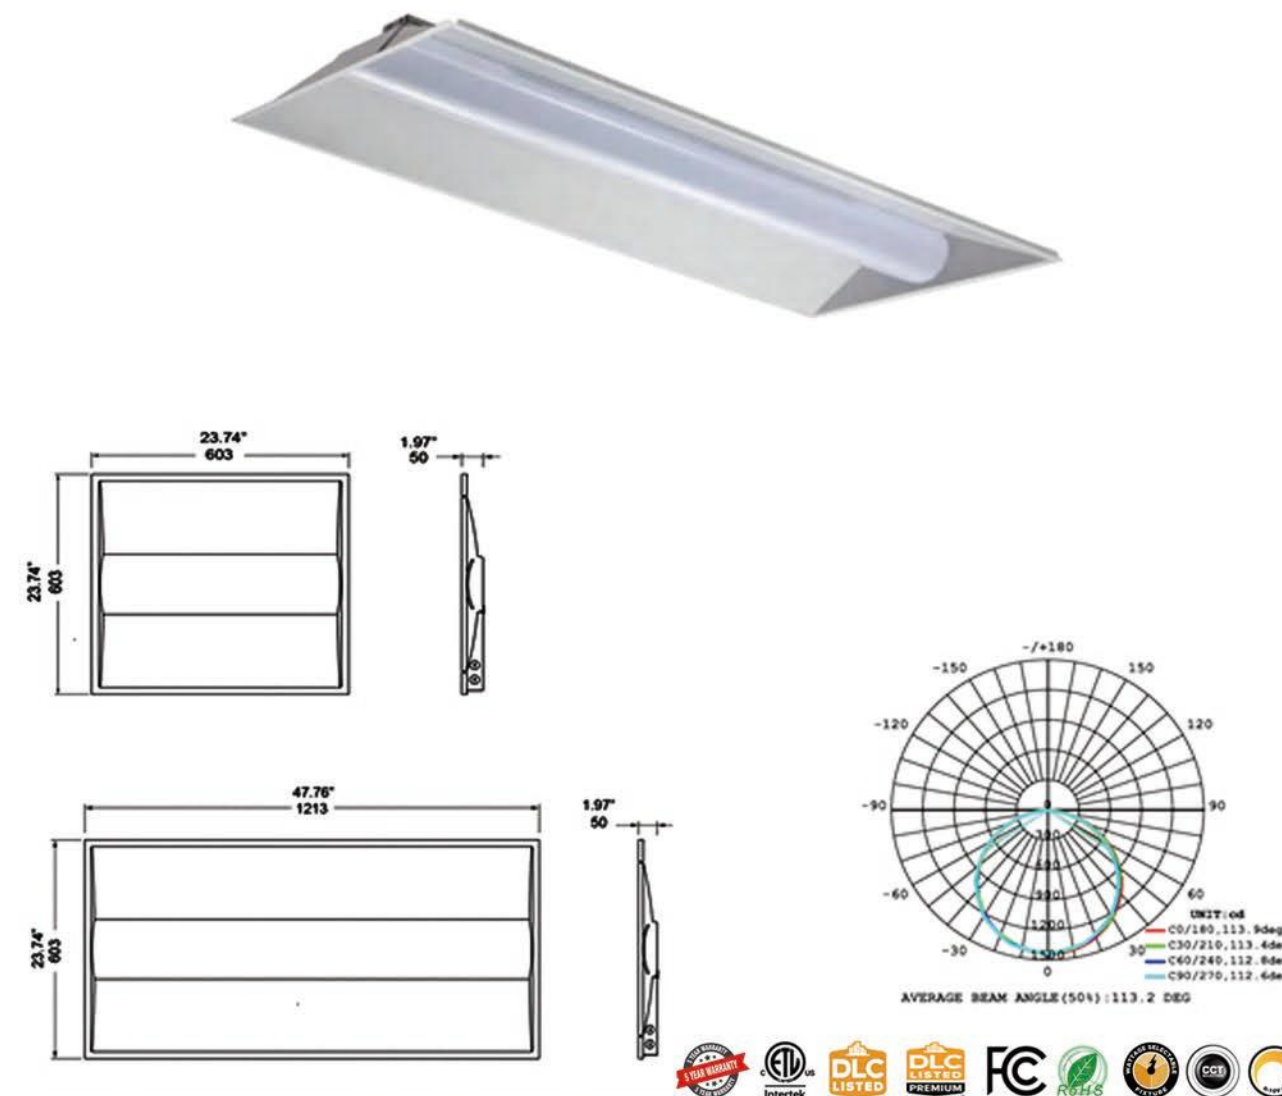

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION
VP1	EY-004C-040-5CCT	2x2	20/25/30/ 35/40W	2500-5000Lm	125	110°	3500/ 4000/ 4500/ 5000/ 6000K	>80	0-10V	/
	EY-005C-060-5CCT	2x4	30/35/40/ 50/60W	3750-7500Lm	125					
VP2	EY-004C-040-5CCT-P	2x2	20/25/30/ 35/40W	2500-5000Lm	125					Radar/microwa ve/infrared sensing
	EY-005C-060-5CCT-P	2x4	30/35/40/ 50/60W	3750-7500Lm	125					
VP3	EY-004C-040-5CCT-H	2x2	20/25/30/ 35/40W	3400-6800Lm	150					High efficiency
	EY-005C-060-5CCT-H	2x4	30/35/40/ 50/60W	5100-10200Lm	150					
VP4	EY-004C-040-5CCT-S	2x2	20/25/30/ 35/40W	2500-5000Lm	125		3500-5000k	>90	APPS	Intelligent interconnection
	EY-005C-060-5CCT-S	2x4	30/35/40/ 50/60W	3750-7500Lm	125					

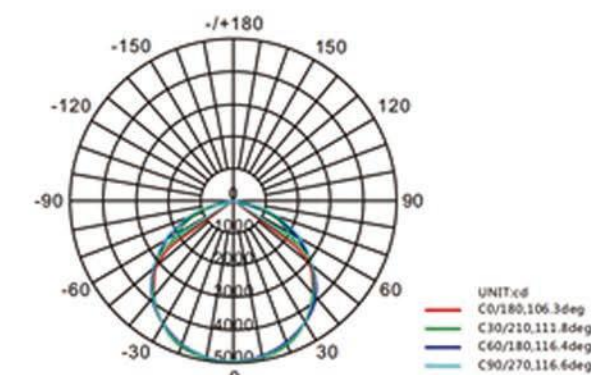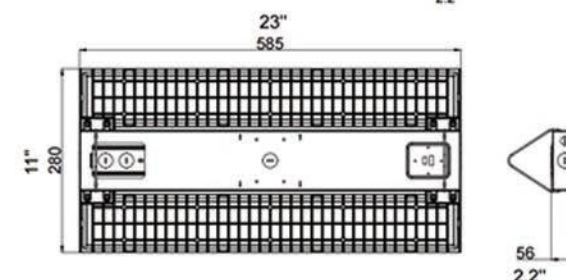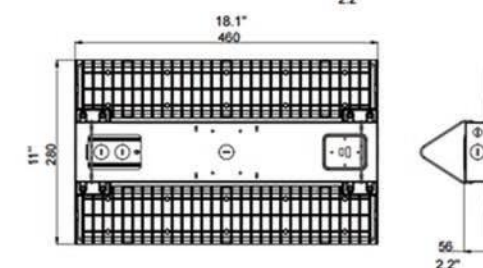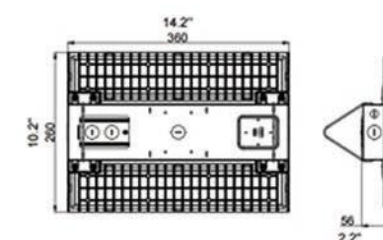

AVERAGE BEAM ANGLE(50%):112.8 DEG





LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMMABLE	FUNCTION
VP1	EG-001C-100-3CCT	14.2*10.2**2.2"	75/85/100W	10125-13500Lm	135	90°	3500K/ 4000K/ 5000K	>70	0-10V	Radar/microwave infrared sensing
	EG-002C-200-3CCT	18.1**11**2.2"	150/175/200W	20250-27000Lm						
	EG-003C-300-3CCT	23**11**2.2"	220/250/300W	29700-40500Lm						
VP2	EG-001C-100-3CCT-P	14.2*10.2**2.2"	75/85/100W	10125-13500Lm						
	EG-002C-200-3CCT-P	18.1**11**2.2"	150/175/200W	20250-27000Lm						
	EG-003C-300-3CCT-P	23**11**2.2"	220/250/300W	29700-40500Lm						
VP3	EG-001C-100-3CCT-H	14.2*10.2**2.2"	75/85/100W	11250-15000Lm	150					
	EG-002C-200-3CCT-H	18.1**11**2.2"	150/175/200W	22500-30000Lm						
	EG-003C-300-3CCT-H	23**11**2.2"	220/250/300W	33000-45000Lm						
VP4	EG-001C-100-3CCT-S	14.2*10.2**2.2"	75/85/100W	10125-13500Lm	135	3500-5000k	>80	APPS	Intelligent interconnection	
	EG-002C-200-3CCT-S	18.1**11**2.2"	150/175/200W	20250-27000Lm						
	EG-003C-300-3CCT-S	23**11**2.2"	220/250/300W	29700-40500Lm						

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
0-10V dimming;
LED SMD 2835/3030.

Sheet metal housing;
High-diffusion light-milky PC diffuser;

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.

Warehouses/Factories/Gyms/Supermarkets/Stadiums/Workshops/Retail spaces/Industrial areas/Garages

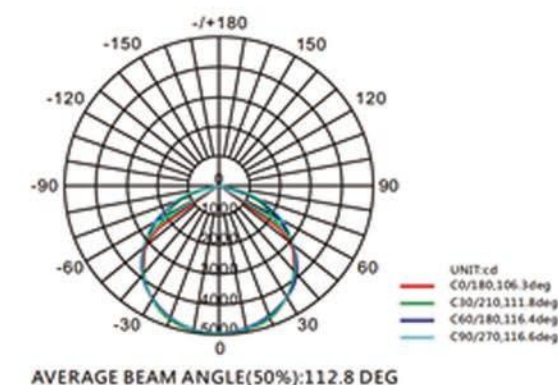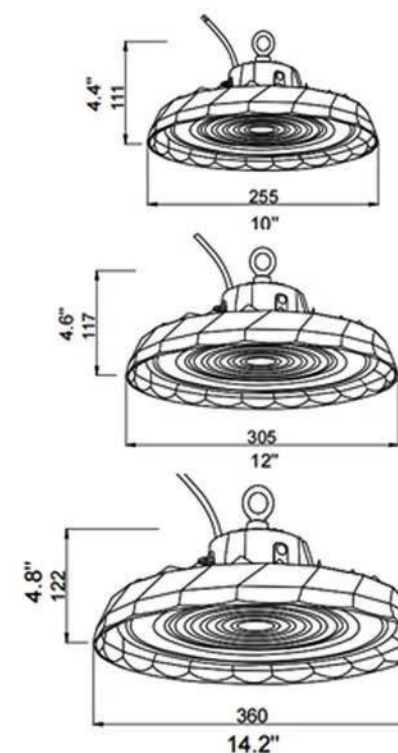

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION	
VP1	EG-004C-100-3CCT	ø10"*4.4"	70/80/100W	10500-15000Lm	150	90°	3500/ 4000/ 5000K	> 70	0-10V	/ Radar/microwav e/infrared sensing	
	EG-005C-150-3CCT	12"*4.6"	100/120/150W	15000-22500Lm							
	EG-006C-200-3CCT	14.2"*4.8"	120/150/200W	18000-30000Lm							
VP2	EG-004C-100-3CCT-P	ø10"*4.4"	70/80/100W	10500-15000Lm							190
	EG-005C-150-3CCT-P	12"*4.6"	100/120/150W	15000-22500Lm							
	EG-006C-200-3CCT-P	14.2"*4.8"	120/150/200W	18000-30000Lm							
VP3	EG-004C-100-3CCT-H	ø10"*4.4"	70/80/100W	13300-19000Lm	High efficiency						
	EG-005C-150-3CCT-H	12"*4.6"	100/120/150W	19000-28500Lm							
	EG-006C-200-3CCT-H	14.2"*4.8"	120/150/200W	22800-38000Lm							
VP4	EG-004C-100-3CCT-S	ø10"*4.4"	70/80/100W	10500-15000Lm	150	3500 -5000k	> 80	APPS	Intelligent interconnection		
	EG-005C-150-3CCT-S	12"*4.6"	100/120/150W	15000-22500Lm							
	EG-006C-200-3CCT-S	14.2"*4.8"	120/150/200W	18000-30000Lm							

Warehouses/Factories/Gyms/Supermarkets/Stadiums/
Workshops/Retail spaces/Industrial areas/Garages



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
0-10V dimming;
LED SMD 2835/3030;
Nominal Size: 4FT/8FT.

SPECIFICATION

Metal frame;
High-diffusion light-milky PC ;
Damp location rated for indoor use.


OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.


APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital


LED LINEAR STRIP

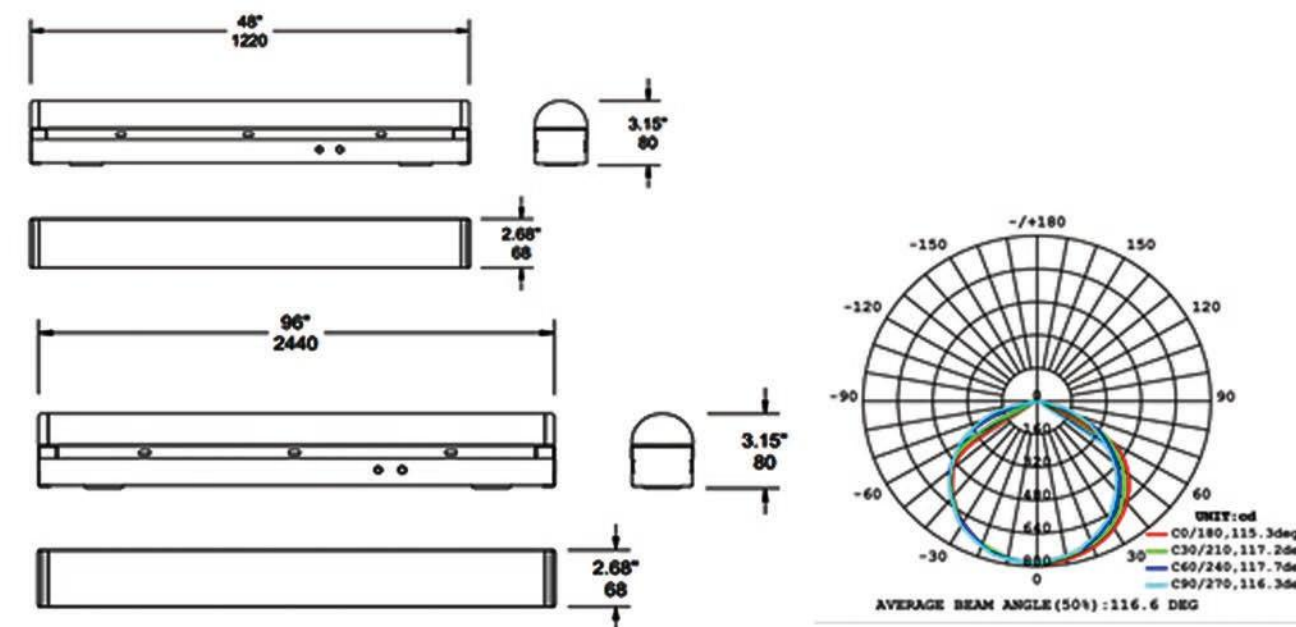

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION
VP1	EE-002C-047-3CCT	4ft	25/30/40W	3250-5200Lm	130	120°	3500/ 4000/ 5000K	>80	0-10V	/
	EE-003C-047-3CCT	8ft	50/65/85W	6500-11050Lm						
VP2	EE-002C-047-3CCT-P	4ft	25/30/40W	3250-5200Lm						Radar/microwave infrared sensing
	EE-003C-047-3CCT-P	8ft	50/65/85W	6500-11050Lm						
VP3	EE-002C-047-3CCT-S	4ft	25/30/40W	3250-5200Lm			3500-5000k	>90	APPS	Intelligent interconnection
	EE-003C-047-3CCT-S	8ft	50/65/85W	6500-11050Lm						

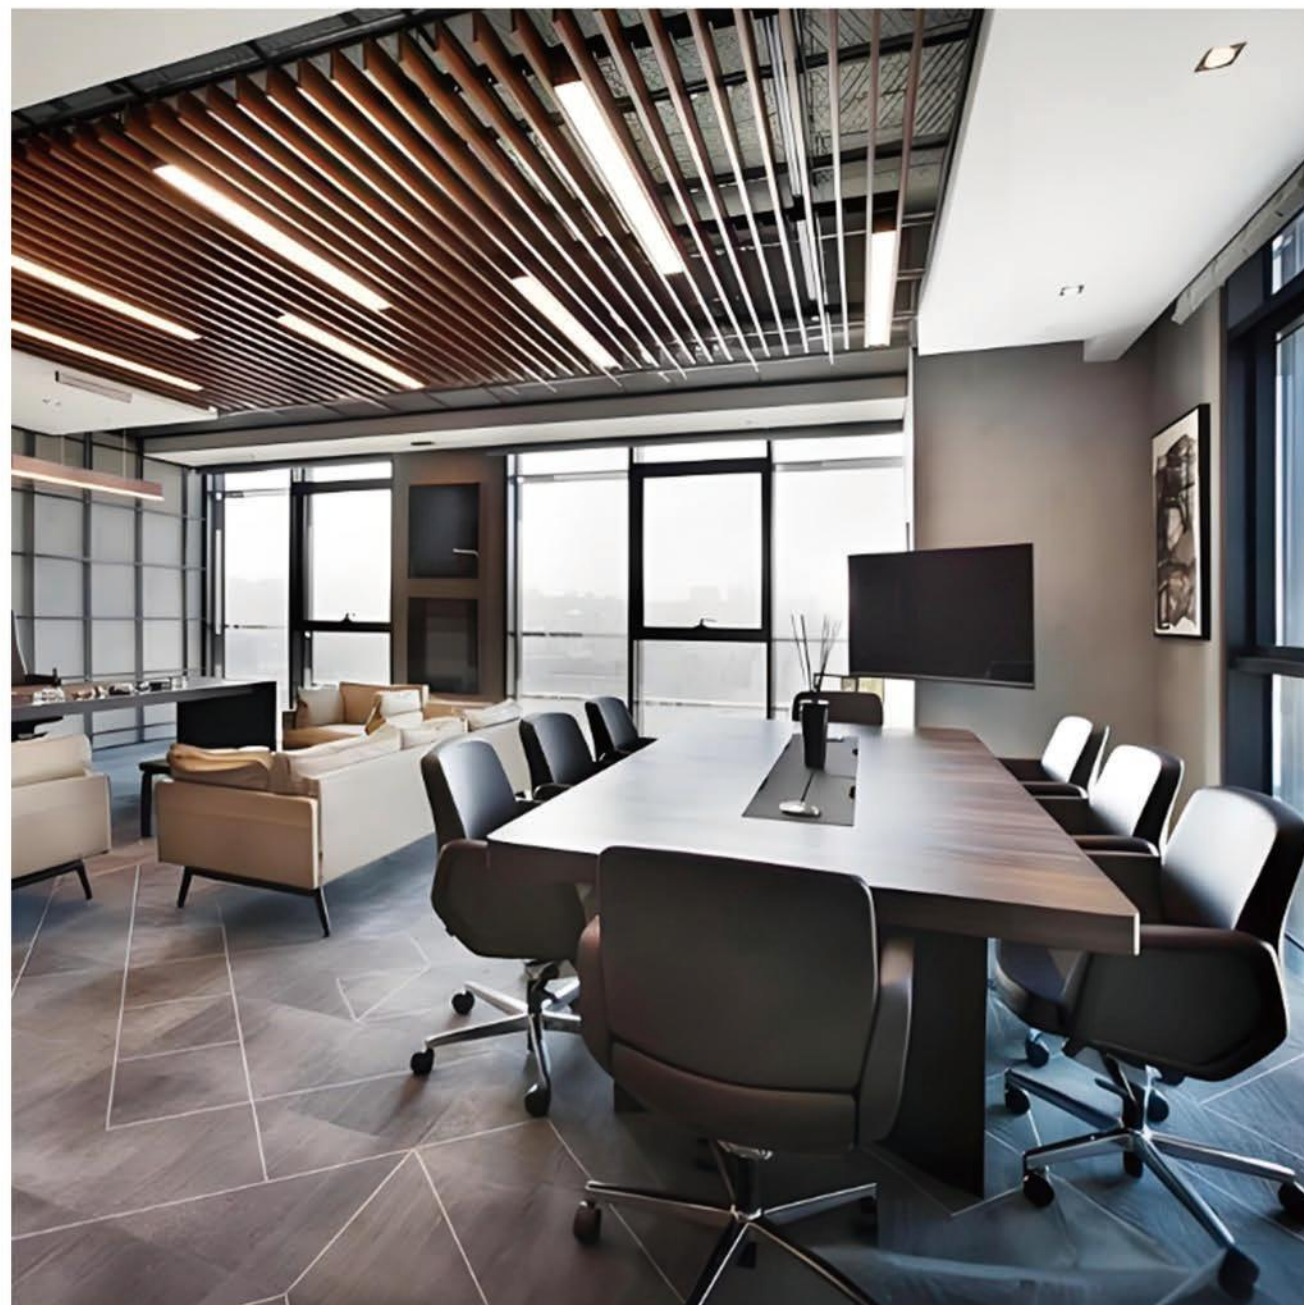

LED UTILITY WRAP

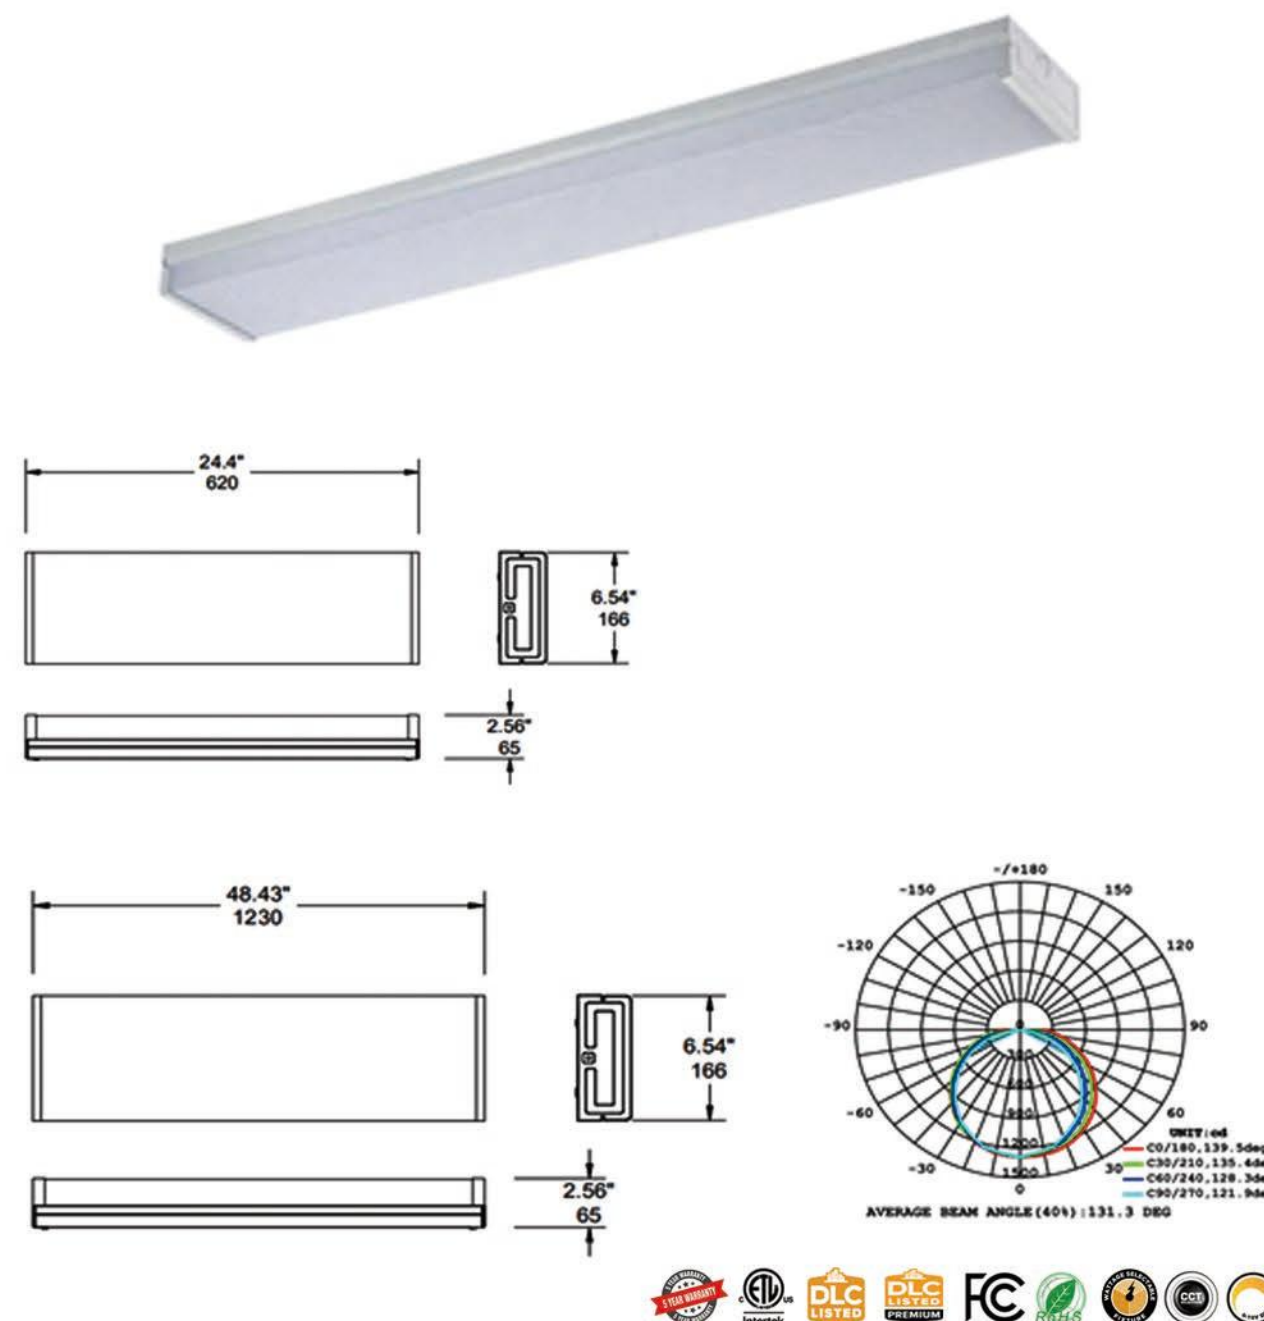

PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
0-10V dimming;
LED SMD 2835/3030;
Nominal Size: 2FT/4FT;

SPECIFICATION

Metal frame,
High-diffusion light-milky PC
Damp location rated for indoor use

OPTION

Available for installing with sensor (*review details on spec sheet)
High efficiency version available
Intelligent interconnection version available


APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (lm/W)	BEAM ANGLE	CCT	CRI	DIMMABLE	FUNCTION
VP1	EE-004C-030-3CCT	2FT	20/25/30W	2600-3900Lm	130	120°	3500/ 4000/ 5000K	>80	0-10V	Radar/microwave/ infrared sensing
	EE-005C-048-3CCT	4FT	23/35/48W	2990-6240Lm	130					
VP2	EE-004C-030-3CCT-P	2FT	20/25/30W	2600-3900Lm	130		3500-5000K	>90	APPS	Intelligent interconnection
	EE-005C-048-3CCT-P	4FT	23/35/48W	2990-6240Lm	130					
VP3	EE-004C-030-3CCT-S	2FT	20/25/30W	2600-3900Lm	130		3500-5000K	>90	APPS	Intelligent interconnection
	EE-005C-048-3CCT-S	4FT	23/35/48W	2990-6240Lm	130					



LED VAPOR TIGHT

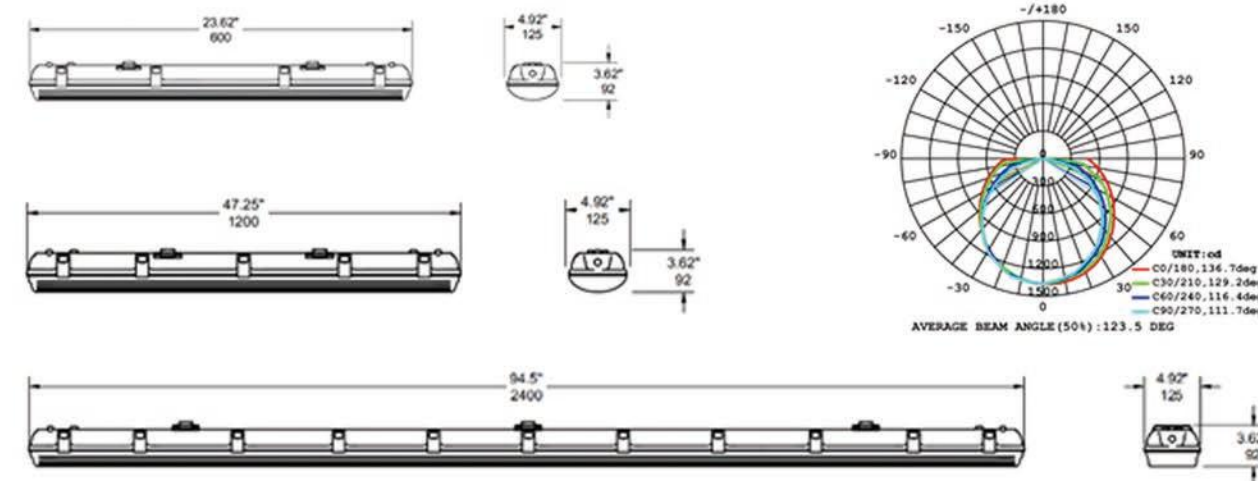

PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
IP65 and IK08 Rated;
LED SMD 2835/3030;
Nominal Size: 2FT/4FT/8FT.

SPECIFICATION

Metal frame;
High-diffusion light-milky PC;
Damp location rated for indoor use.

OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW(Lm/W)	BEAM ANGLE	CCT	CRI	DIMMABLE	FUNCTION
VP1	EF-001C-024-3CCT	2FT	16/20/24W	2080-3120Lm	130	120°	3500K-4000K-5000K	>80	0-10V	Radar/microwave/infrared sensing
	EF-002C-050-3CCT	4FT	32/44/50W	4160-6500Lm	130					
	EF-003C-120-3CCT	8FT	80/100/120W	10400-15600Lm	130					
VP2	EF-001C-024-3CCT-P	2FT	16/20/24W	2080-3120Lm	130		3500-5000k	>90	APPS	Intelligent interconnection
	EF-002C-050-3CCT-P	4FT	32/44/50W	4160-6500Lm	130					
	EF-003C-120-3CCT-P	8FT	80/100/120W	10400-15600Lm	130					
VP3	EF-001C-024-3CCT-S	2FT	16/20/24W	2080-3120Lm	130					
	EF-002C-050-3CCT-S	4FT	32/44/50W	4160-6500Lm	130					
	EF-003C-120-3CCT-S	8FT	80/100/120W	10400-15600Lm	130					

LED FLOOD LIGHTS



PRODUCT DESCRIPTION


LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION


Die-cast Aluminum;
UV Resistant PC Lens;
Tempered Glass.

APPLICATIONS


Facade/Wall washing/Landscape lighting
Building lighting/Sign lighting/
Commercial lighting

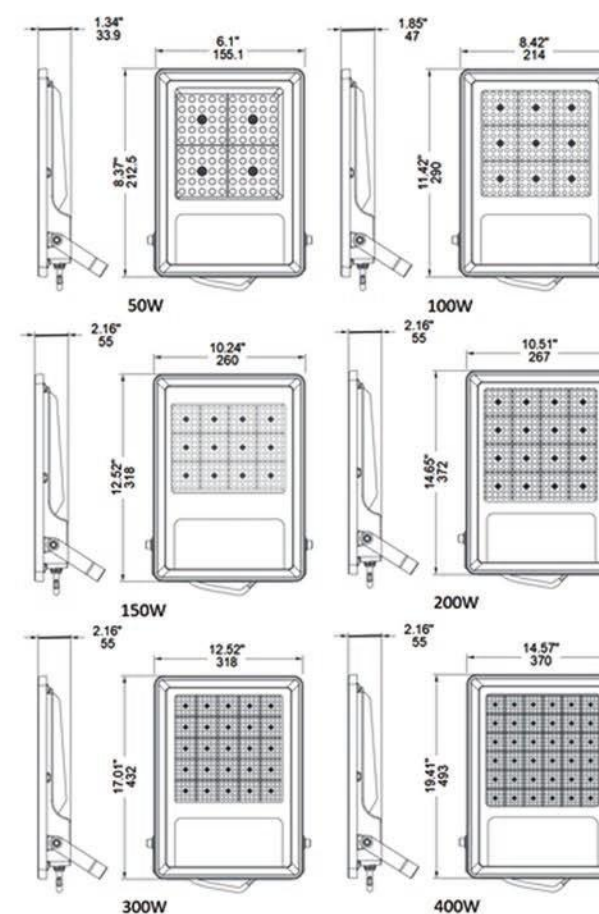

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

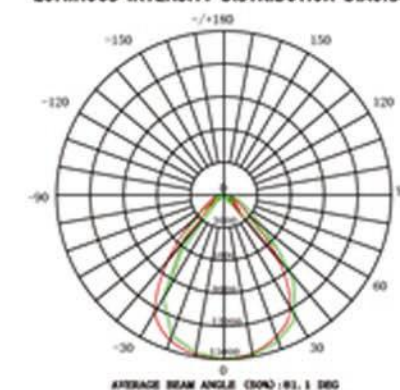



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EF-001C-050-7**	8.37"*6.1"*1.34"	50W	5500Lm	110	90°	4000/ 5000/ 6500K	>70	/
	EF-002C-100-7**	11.42"*8.42"*2.16"	100W	11000Lm					
	EF-003C-150-7**	12.52"*10.24"*2.16"	150W	16500Lm					
	EF-004C-200-7**	14.65"*10.51"*2.16"	200W	22000Lm					
	EF-005C-300-7**	17.01"*12.52"*2.16"	300W	33000Lm					
	EF-006C-400-7**	19.41"*14.57"*2.16"	400W	44000Lm					

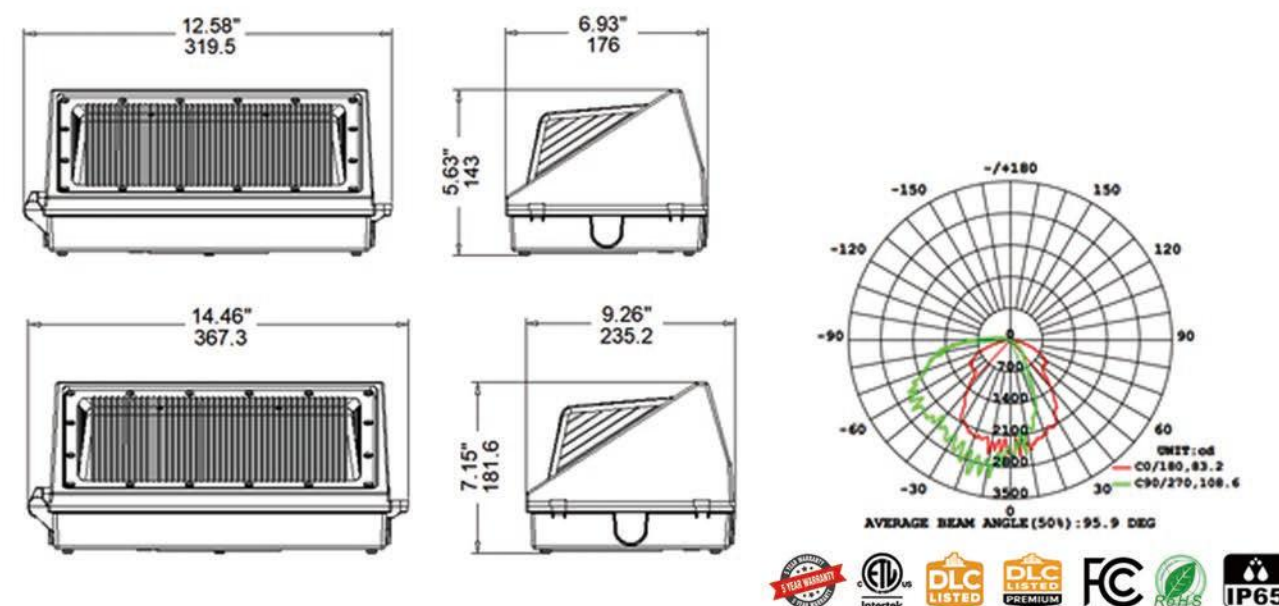

Garages/Building lighting/Packing lot
lighting/Entryway/Storage warehouses/Security lighting

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION
VP1	EL-001B-060-CCT	12.58"x6.93"x5.63"	60W	6300Lm	105	90°	3500/ 4000/ 5000K	≥70	0-10V	/
	EL-002B-100-CCT	14.67"x9.26"x7.15"	100W	10500Lm						
	EL-003B-120-CCT	14.67"x9.26"x7.15"	120W	12600Lm						
VP1	EL-001B-060-CCT-P	12.58"x6.93"x5.63"	60W	6300Lm						(photocell on/off)
	EL-002B-100-CCT-P	14.67"x9.26"x7.15"	100W	10500Lm						
	EL-003B-120-CCT-P	14.67"x9.26"x7.15"	120W	12600Lm						

WALL LUMINAIRES

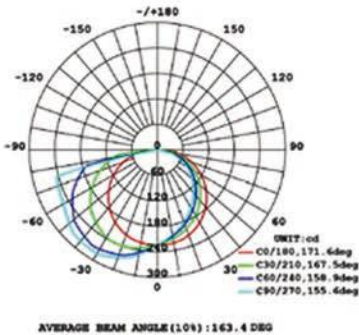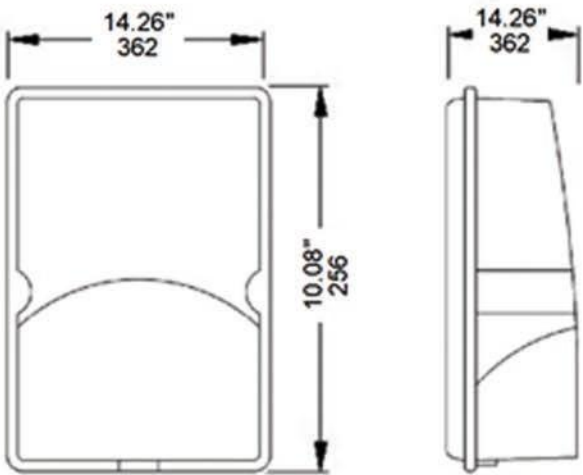

PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION

Aluminum Housing ;
UV Resistant PC Lens.

OPTION

Available for installing with sensor (*review details on spec sheet);




APPLICATIONS

Garages/Building lighting/Packing lot
lighting/Entryway/Storage warehouses/Security lighting



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EL-004B-030-7**	10.08"x14.26"x14.26"	30W	3150Lm	105	110°	3000/ 4000/ 5000/ 5700K	>70	/
VP1	EL-004B-030-7**	10.08"x14.26"x14.26"	30W	3150Lm	105	100°	3000/ 4000/ 5000/ 5700K	>70	(photocell on/off)

WALL LUMINAIRES

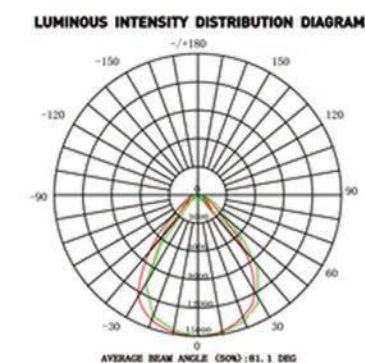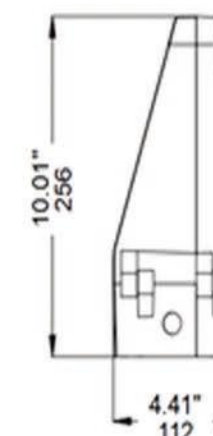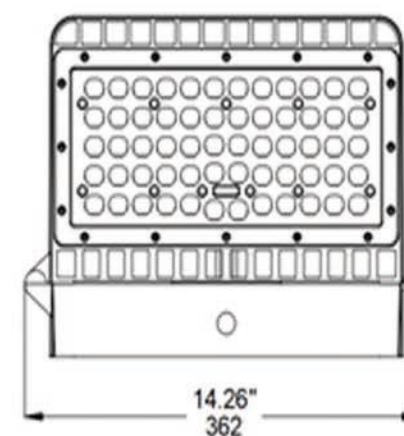

PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION

Die Cast Aluminum ;
UV Resistant PC Lens.

OPTION

Available for installing with sensor (*review details on spec sheet);

APPLICATIONS

Garages/Building lighting/Packing lot
lighting/Entryway/Storage warehouses/Security lighting



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EL-0045B-030-7**	10.08"x14.26"x14.26"	30W	3150Lm	105	90°	3000/ 4000/ 5000/ 5700K	>70	/
VP2	EL-0045B-030-7**-P	10.08"x14.26"x14.26"	30W	3150Lm					(photocell on/off)

AREA LIGHTS



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION


Die Cast Aluminum ;
UV Resistant PC Lens.

OPTION


Available for installing with sensor (*review details on spec sheet);

APPLICATIONS




Highway/park/parkinglot/community/factory/yard/stadium/school

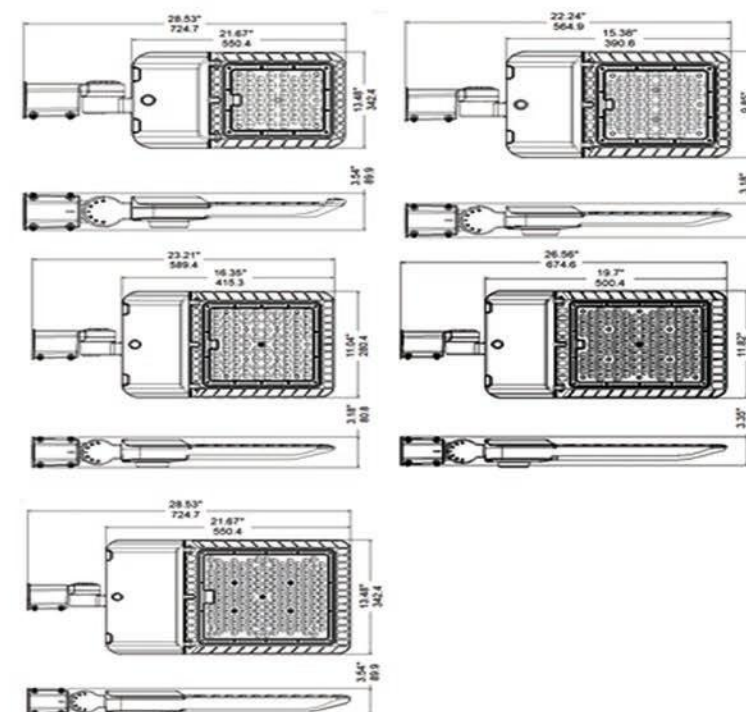

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

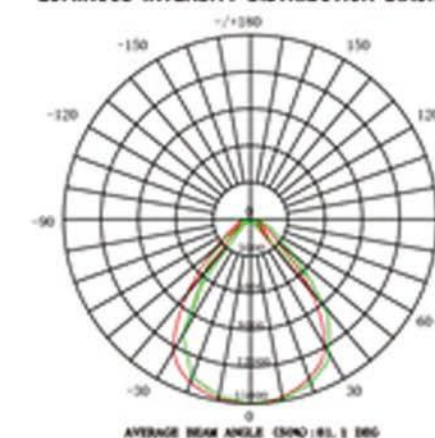

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EG-004C-100-3CCT	28.53"x13.48"x3.54"	70/80/100W	10500-15000Lm	120	90°	3500/ 4000/ 5000K	>70	/
	EG-005C-150-3CCT	22.24"x9.85"x3.18"	100/120/150W	15000-22500Lm					
	EG-006C-200-3CCT	28.53"x13.48"x3.54"	120/150/200W	18000-30000Lm					
	EG-006C-200-3CCT	28.53"x13.48"x3.54"	200/250/300W	18000-30000Lm					
	EG-006C-200-3CCT	28.53"x13.48"x3.54"	300/350/400W	18000-30000Lm					

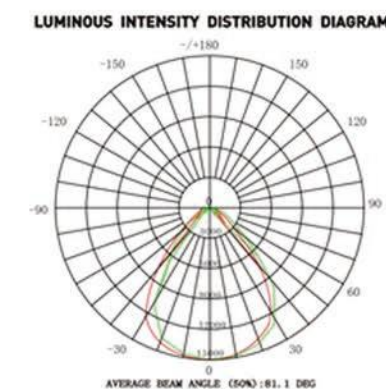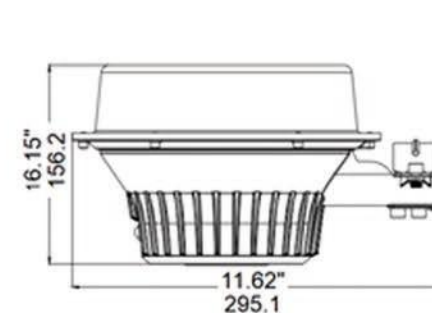

Highway/park/parkinglot/community/factory/yard/stadium/school

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION
VP1	EA-001B-040-CCT	ø9.54"x16.15"	40W	5120Lm	128	90°	3500/ 4000/ 5000K	>70	0-10V	/
	EA-002B-050-CCT	ø9.54"x16.15"	50W	6400Lm						
	EA-003B-060-CCT	ø9.54"x16.15"	60W	7680Lm						
VP2	EA-001B-040-CCT-P	ø9.54"x16.15"	40W	5120Lm	128	90°	3500/ 4000/ 5000K	>70	0-10V	(photocell on/off)
	EA-002B-050-CCT-P	ø9.54"x16.15"	50W	6400Lm						
	EA-003B-060-CCT-P	ø9.54"x16.15"	60W	7680Lm						





PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION

Die-cast Aluminum;
Tempered Glass.




OPTION

Available for installing with sensor (*review details on spec sheet);

APPLICATIONS

Highway/park/parkinglot/community/factory/yard/stadium/school

LED PARKING LOT LIGHT

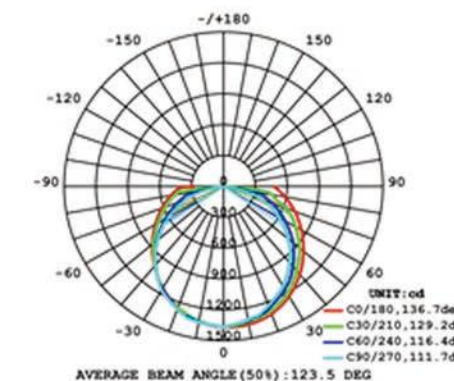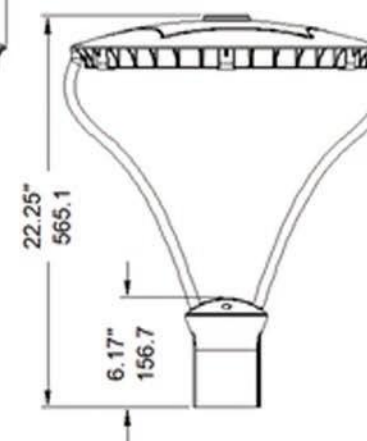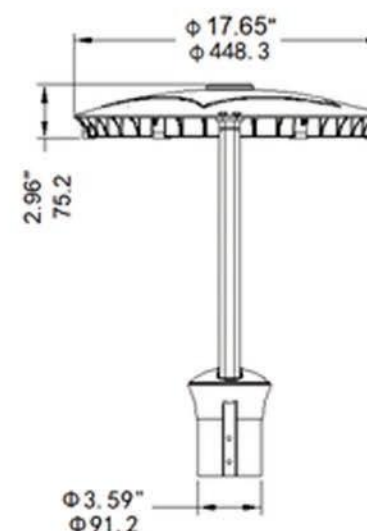

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EP-001B-050-7**	ø17.65"x22.25"	50W	5250Lm	105	120°	3500/ 4000/ 5000K	>70	/
	EP-002B-100-7**	ø17.65"x22.25"	100W	10500Lm					
VP2	EP-001B-050-7**-P	ø17.65"x22.25"	50W	5250Lm	105	120°	3500/ 4000/ 5000K	>70	(photocell on/off)
	EP-002B-100-7**-P	ø17.65"x22.25"	100W	10500Lm					



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.




SPECIFICATION

Die-cast Aluminum;
UV Resistant PC Lens.

APPLICATIONS

Garage/Shop/Gas
station/Workshop/Carport/Underpass/Walkway/Warehouse
use

LED CANOPY LIGHT

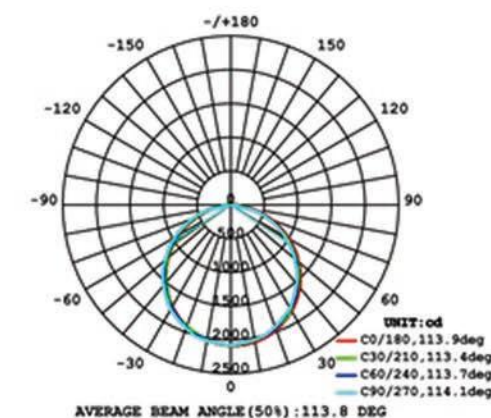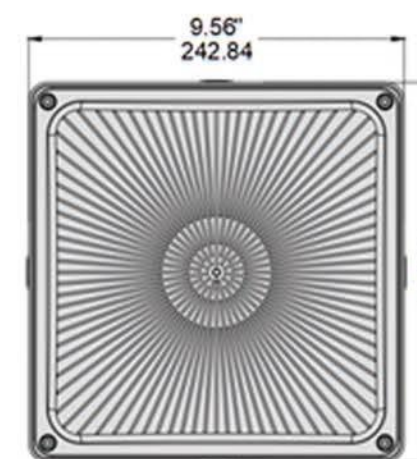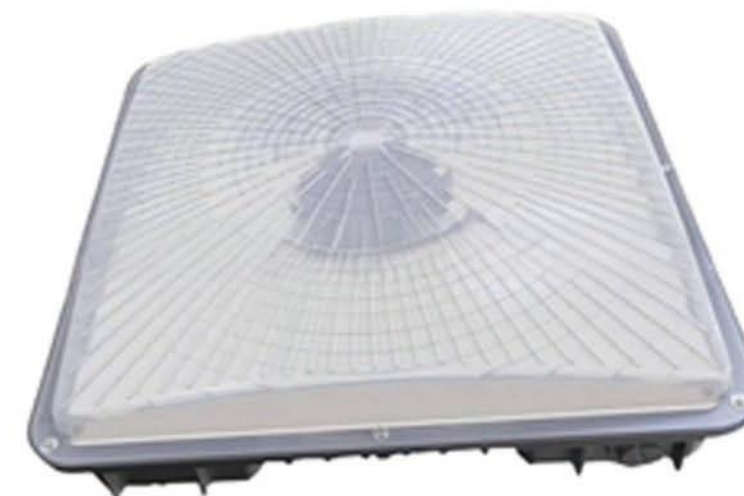

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EC-001C-080-7**	9.56"x9.56"x3.35"	80W	10400Lm	130	110°	3500/ 4000/ 5000K	>70	/