


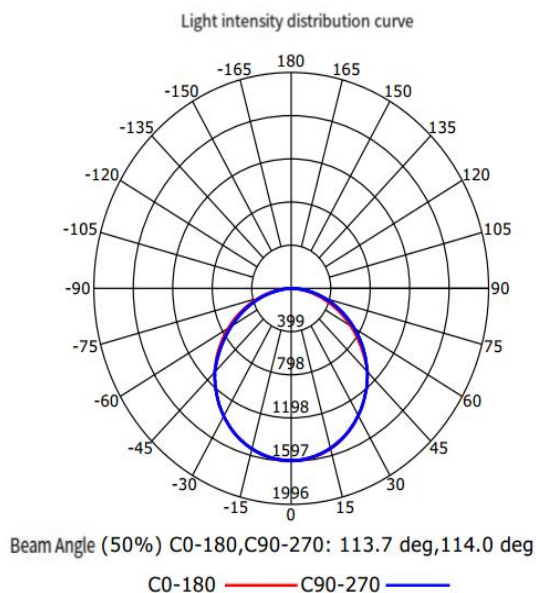

Specifications		VP1		
		EY-001C-040-3CCT	EY-002C-040-3CCT	EY-003C-050-3CCT
Size		2' x2'	1' x4'	2' x4'
Product dimensions	Height(in.)	1.4"	1.4"	1.4"
	Width (in.)	23.7"	12"	23.7"
	Length(in.)	23.7"	47.8"	47.8"
Material		Aluminum		
Lens Material		Polystyrene (PS)		
Rated Wattage		20/30/40W(Wattage Selectable)	20/30/40W(Wattage Selectable)	30/40/50W(Wattage Selectable)
Lumens (Lm)		2200-4400Lm	2200-4400Lm	3300-5500Lm
Lumens Efficacy		110Lm/W		
CCT		3500K/4000K/5000K (CCT Selectable)		
CRI		≥80		
Voltage		120V-277V		
Beam Angle		110 °		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Dimming Technology		0-10V		
Photocell or Sensor		No		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-20℃ (-4F)~50℃ (+122F)		
IP Rating		IP20		
Warranty		5 years		
Way to install		Recessed		
Application		Shop/School /Office/Hotel /Conference/Room/Hospital		