


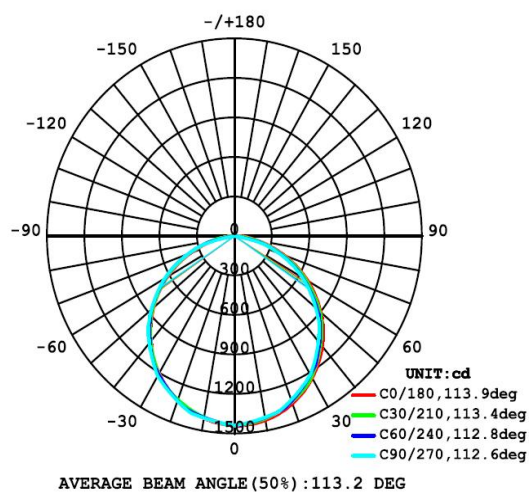

Specifications		VP2	
		EY-004C-040-5CCT-P	EY-005C-060-5CCT-P
Size		2' x2'	2' x4'
Product dimensions	Height(in.)	1.97"	1.97"
	Width (in.)	23.74"	23.74"
	Length(in.)	23.74"	47.76"
Material		Sheet Metal	
Lens Material		PC	
Rated Wattage		20/25/30/35/40W(Wattage Selectable)	30/35/40/50/60W(Wattage Selectable)
Lumens (Lm)		2500-5000Lm	3750-7500Lm
Lumens Efficacy		125Lm/W	
CCT		3500/4000/4500/5000/6000K (CCT Selectable)	
CRI		≥80	
Voltage		120V-277V	
Beam Angle		110 °	
Power Factor		≥0.9	
L70 Lumen Maintenance (Hours)		50000	
Dimming Technology		/	
Photocell or Sensor		Radar/microwave/infrared sensing	
Surge Protection		2.5KV	
Certifications		ETL、FCC、ROSH	
Qualifications		DLC	
Operating Temperature		-20℃ (-4F)~50℃ (+122F)	
IP Rating		IP20	
Warranty		5 years	
Way to install		Recessed	
Application		Shop/School /Office/Hotel/Conference/Room/Hospital	