


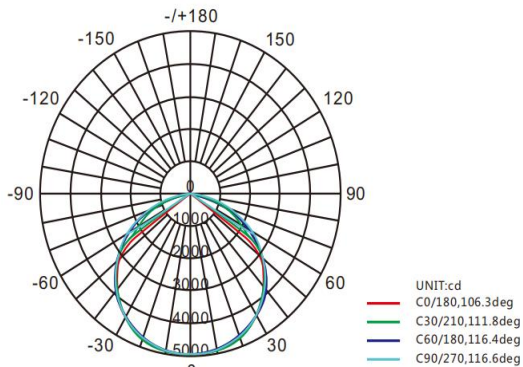

AVERAGE BEAM ANGLE(50%):112.8 DEG

Specifications		VP2		
		EG-001C-100-3CCT-P	EG-002C-200-3CCT-P	EG-003C-300-3CCT-P
Product dimensions	Height(in.)	2.2"	2.2"	2.2"
	Width (in.)	10.2"	11"	11"
	Length(in.)	14.2"	18.1"	18.1"
Material		Aluminum		
Lens Material		PMMA		
Rated Wattage		75/85/100W(Wattage Selectable)	150/175/200W(Wattage Selectable)	220/250/300W(Wattage Selectable)
Lumens (Lm)		10125-13500Lm	20250-27000Lm	29700-40500Lm
Lumens Efficacy		135Lm/W		
CCT		3500K-4000K-5000K (CCT Selectable)		
CRI		≥70		
Voltage		120V-277V		
Beam Angle		90 °		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Dimming Technology		/		
Photocell or Sensor		Radar/microwave/infrared sensing		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-40℃ (-40F)~50℃ (+122F)		
IP Rating		IP20		
Warranty		5 years		
Way to install		Ceiling Mount		
Application		Warehouses/Factories/Gyms/Supermarkets/Stadiums/Workshops/Retail spaces/Industrial areas/Garages		