


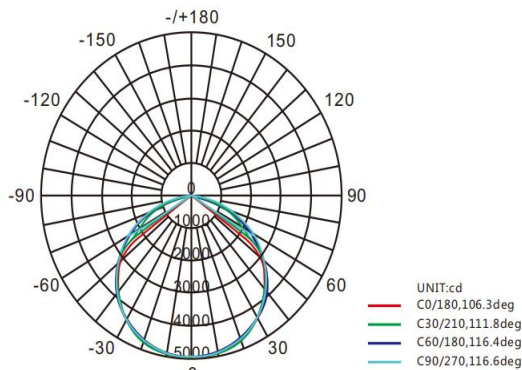

AVERAGE BEAM ANGLE(50%):112.8 DEG

Specifications		VP4		
		EG-001C-100-3CCT-S	EG-002C-200-3CCT-S	EG-003C-300-3CCT-S
Product dimensions	Height(in.)	2.2"	2.2"	2.2"
	Width (in.)	10.2"	11"	11"
	Length(in.)	14.2"	18.1"	18.1"
Material		Aluminum		
Lens Material		PMMA		
Rated Wattage		75/85/100W	150/175/200W	220/250/300W
Lumens (Lm)		10125-13500Lm	20250-27000Lm	29700-40500Lm
Lumens Efficacy		135Lm/W		
CCT		3500K-5000K		
CRI		≥80		
Voltage		120V-277V		
Beam Angle		90 °		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Smart Product Info	IOT Enabled	Yes		
	Software Upgradeable	Yes		
	Communication Protocol	WiFi		
	Voice Assistants	Siri Shortcuts; Alexa; Hey Google; SmartThings (optional)		
	Software Supported	Tuya/else APP (optional)		
Dimmable		Yes		
Dimming Note		APP		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-40℃ (-40F)~50℃ (+122F)		
IP Rating		IP20		
Warranty		5 years		
Way to install		Ceiling Mount		
Application		Warehouses/Factories/Gyms/Supermarkets/Stadiums/Workshops/Retail spaces/Industrial areas/Garages		