


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

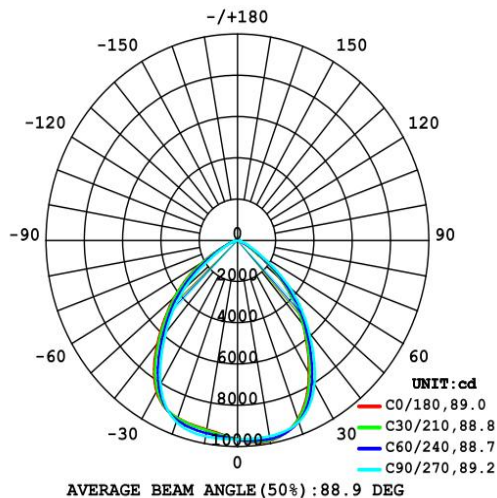

Specifications		VP4		
		EG-004C-100-3CCT-S	EG-005C-150-3CCT-S	EG-006C-200-3CCT-S
Product dimensions	Height(in.)	4.4"	4.6"	4.8"
	Width (in.)	/	/	/
	Length(in.)	ø10"	ø12"	ø14.2"
Material		Aluminum		
Lens Material		PC		
Rated Wattage		70/80/100W(Wattage Selectable)	100/120/150W(Wattage Selectable)	120/150/200W(Wattage Selectable)
Lumens (Lm)		10500-15000Lm	15000-22500Lm	18000-30000Lm
Lumens Efficacy		150Lm/W		
CCT		3500K-4000K-5000K (CCT Selectable)		
CRI		≥80		
Voltage		120V-277V		
Beam Angle		90 °		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Smart Product Info	IOT Enabled	Yes		
	Software Upgradeable	Yes		
	Communication Protocol	WiFi		
	Voice Assistants	Siri Shortcuts; Alexa; Hey Google; SmartThings (optional)		
	Software Supported	Tuya/else APP (optional)		
Dimmable		Yes		
Dimming Note		APP		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-40℃ (-40F)~50℃ (+122F)		
IP Rating		IP65/IK08		
Warranty		5 years		
Way to install		Ceiling Mount		
Application		Warehouses/Factories/Gyms/Supermarkets/Stadiums/Workshops/Retail spaces/Industrial areas/Garages		