


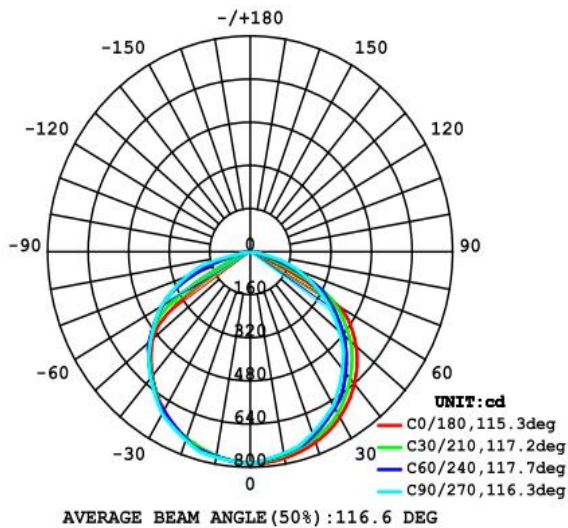

Specifications		VP2	
		EE-002C-047-3CCT-P	EE-003C-047-3CCT-P
Size		4ft	8ft
Product dimensions	Height(in.)	3.15"	3.15"
	Width (in.)	2.68"	2.68"
	Length(in.)	48"	96"
Material		Sheet Metal	
Lens Material		PC	
Rated Wattage		25/30/40W(Wattage Selectable)	50/65/85W(Wattage Selectable)
Lumens (Lm)		3250-5200Lm	6500-11050Lm
Lumens Efficacy		130Lm/W	
CCT		3500K/4000K/5000K (CCT Selectable)	
CRI		≥80	
Voltage		120V-277V	
Beam Angle		120 °	
Power Factor		≥0.9	
L70 Lumen Maintenance (Hours)		50000	
Dimming Technology		0-10V	
PhotoCell or Sensor		Radar/microwave/infrared sensing	
Surge Protection		2.5KV	
Certifications		ETL、FCC、ROSH	
Qualifications		DLC	
Operating Temperature		-20℃ (-4F)~50℃ (122F)	
IP Rating		IP20	
Warranty		5 years	
Way to install		Surface Mounting/Drop Ceiling	
Application		Shop/School/Office/Hotel/Conference/Room/Hospital	