


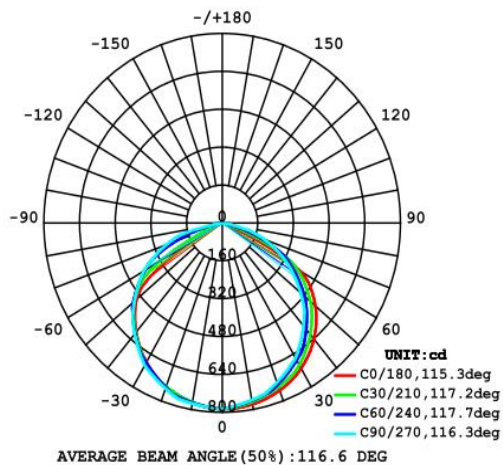

Specifications		VP3	
		EE-004C-030-3CCT-S	EE-005C-048-3CCT-S
Size		2ft	4ft
Product dimensions	Height (in.)	2.56"	2.56"
	Width (in.)	6.54"	6.54"
	Length (in.)	24.4"	48.43"
Material		Sheet Metal	
Lens Material		PC	
Rated Wattage		20/25/30W	23/35/48W
Lumens (Lm)		2600-3900Lm	2990-6240Lm
Lumens Efficacy		130Lm/W	
CCT		3500K-5000K	
CRI		≥80	
Voltage		120V-277V	
Beam Angle		120 °	
Power Factor		≥0.9	
L70 Lumen Maintenance (Hours)		50000	
Smart Product Info	IOT Enabled	Yes	
	Software Upgradeable	Yes	
	Communication Protocol	WiFi	
	Voice Assistants	Siri Shortcuts; Alexa; Hey Google; SmartThings (optional)	
	Software Supported	Tuya/else APP (optional)	
Dimmable		Yes	
Dimming Note		APP	
Surge Protection		2.5KV	
Certifications		ETL、FCC、ROSH	
Qualifications		DLC	
Operating Temperature		-20℃ (-4F)~50℃ (122F)	
IP Rating		IP20	
Warranty		5 years	
Way to install		Surface Mounting/Drop Ceiling	
Application		Shop/School/Office/Hotel/Conference/Room/Hospital	