


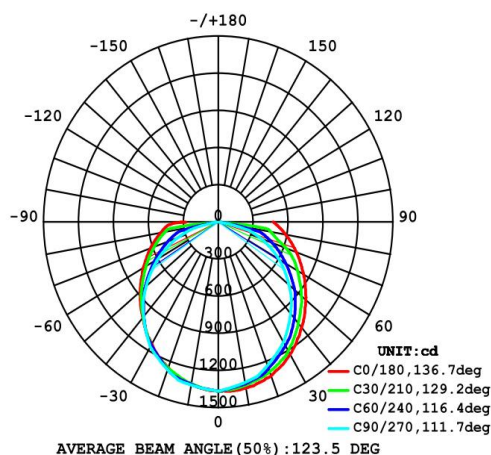

Specifications		VP3		
		EF-001C-024-3CCT-S	EF-002C-050-3CCT-S	EF-003C-120-3CCT-S
Size		2ft	4ft	8ft
Product dimensions	Height(in.)	3.62"	3.62"	3.62"
	Width (in.)	4.92"	4.92"	4.92"
	Length(in.)	23.62"	47.25"	94.5"
Material		PC		
Lens Material		PC		
Rated Wattage		16/20/24W	32/44/50W	80/100/120W
Lumens (Lm)		2080-3120Lm	4160-6500Lm	10400-15600Lm
Lumens Efficacy		130Lm/W		
CCT		3500K-5000K		
CRI		≥90		
Voltage		120V-277V		
Beam Angle		120 °		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Smart Product Info	IOT Enabled	Yes		
	Software Upgradeable	Yes		
	Communication Protocol	WiFi		
	Voice Assistants Supported	Siri Shortcuts; Alexa; Hey Google; SmartThings (optional)		
	Software Supported	Tuya/else APP (optional)		
Dimmable		Yes		
Dimming Note		APP		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-40℃ (-40F)~50℃ (122F)		
IP Rating		IP65/IK08		
Warranty		5 years		
Way to install		Surface Mounting/Drop Ceiling		
Application		Shop/School/Office/Hotel/Conference/Room/Hospital		