




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

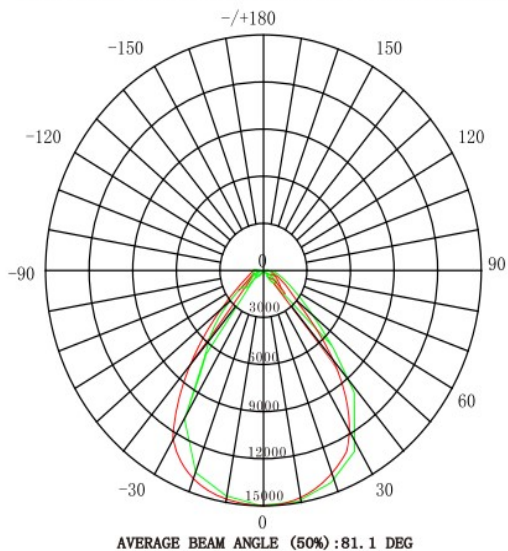

Specifications		VP2		
		EA-001B-040-CCT-P	EA-002B-050-CCT-P	EA-003B-060-CCT-P
Product dimensions	Height(in.)	ø9.54"		
	Width (in.)	/		
	Length(in.)	16.15"		
Material		Die Cast Aluminum		
Lens Material		UV Resistant PC Lens		
Rated Wattage		40W	50W	60W
Lumens (Lm)		5120Lm	6400Lm	7680Lm
Lumens Efficacy		128Lm/W		
CCT		3000K/4000K/5000K		
CRI		≥70		
Voltage		120V-277V		
Beam Angle		90°		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Dimming Technology		NO		
Photocell or Sensor		photocell on/off		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-40℃ (-40F) ~ 50℃ (+122F)		
IP Rating		IP65/IK08		
Warranty		5 years		
Way to install		Wall Mounting / Pole Montiong		
Application		Highway/park/parkinglot/community/factory/yard/stadium/school		