


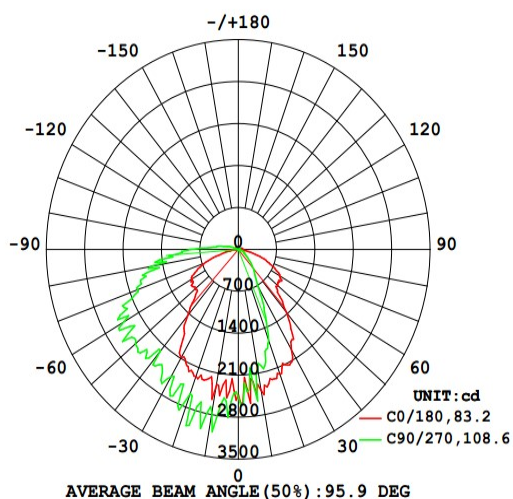

Specifications		VP2		
		EL-001B-060-CCT-P	EL-002B-100-CCT-P	EL-003B-120-CCT-P
Product dimensions	Height(in.)	12.58"	14.67"	14.67"
	Width (in.)	6.93"	9.26"	9.26"
	Length(in.)	5.63"	7.15"	7.15"
Material		Aluminum Housing		
Lens Material		UV Resistant PC Lens		
Rated Wattage		60W	100W	120W
Lumens (Lm)		6300Lm	10500Lm	12600Lm
Lumens Efficacy		105Lm/W		
CCT		3500K/4000K/5000K		
CRI		≥70		
Voltage		120V-277V		
Beam Angle		90°		
Power Factor		≥0.9		
L70 Lumen Maintenance (Hours)		50000		
Dimming Technology		0-10V		
Photocell or Sensor		photocell on/off		
Surge Protection		2.5KV		
Certifications		ETL、FCC、ROSH		
Qualifications		DLC		
Operating Temperature		-40℃ (-40F) ~50℃ (+122F)		
IP Rating		IP65/IK08		
Warranty		5 years		
Way to install		Wall Mount		
Application		Garages/Building lighting/Packing lot lighting/Entryway/Storage warehouses/Security lighting		