


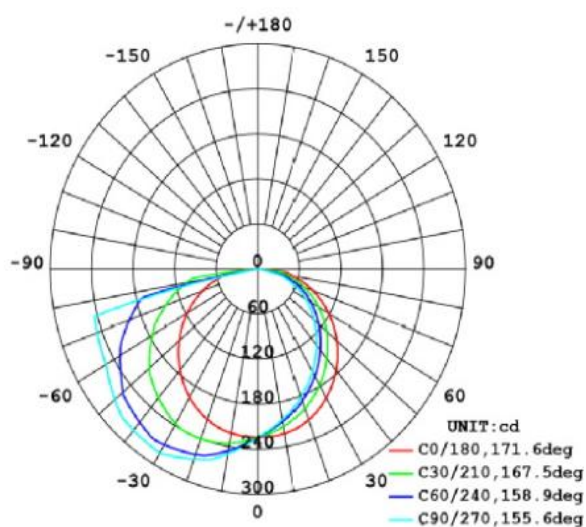

AVERAGE BEAM ANGLE(10%):163.4 DEG

Specifications		VP1	VP2
		EL-004B-030-7**	EL-004B-030-7**-P
Product dimensions	Height(in.)	9.02"	9.02"
	Width (in.)	7.2"	7.2"
	Length(in.)	2.8"	2.8"
Material		Aluminum Housing	
Lens Material		UV Resistant PC Lens	
Rated Wattage		30W	30W
Lumens (Lm)		3150Lm	3150Lm
Lumens Efficacy		105Lm/W	
CCT		3000K/4000K/5000K/5700K	
CRI		≥70	
Voltage		120V-277V	
Beam Angle		160 °	
Power Factor		≥0.8	
L70 Lumen Maintenance (Hours)		50000	
Dimming Technology		NO	
Photocell or Sensor		NO	photocell on/off
Surge Protection		2.5KV	
Certifications		ETL、FCC、ROSH	
Qualifications		DLC	
Operating Temperature		-40℃ (-40F)~50℃ (+122F)	
IP Rating		IP65/IK08	
Warranty		5 years	
Way to install		Wall Mount	
Application		Garages/Building lighting/Packing lot lighting/Entryway/Storage warehouses/Security lighting	