


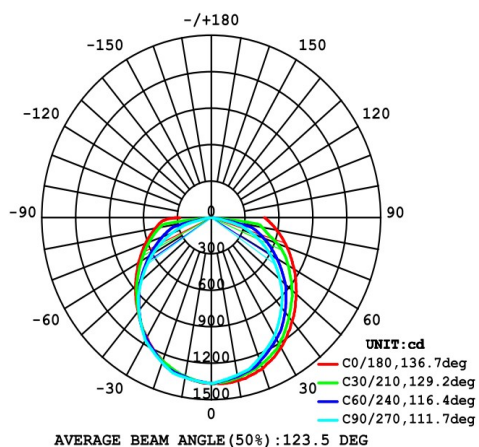

Specifications		VP2	
		EP-001B-050-7**-P	EP-002B-100-7**-P
Product dimensions	Height (in.)	ø17.65"	
	Width (in.)	/	
	Length (in.)	22.25"	
Material		Die Cast Aluminum	
Lens Material		Tempered Glass	
Rated Wattage		50W	100W
Lumens (Lm)		5250Lm	10500Lm
Lumens Efficacy		105Lm/W	
CCT		3000K/4000K/5000K	
CRI		≥70	
Voltage		120V-277V	
Beam Angle		120°	
Power Factor		≥0.9	
L70 Lumen Maintenance (Hours)		50000	
Dimming Technology		NO	
Photocell or Sensor		photocell on/off	
Surge Protection		2.5KV	
Certifications		ETL、FCC、ROSH	
Qualifications		DLC	
Operating Temperature		-40℃ (-40F) ~ 50℃ (+122F)	
IP Rating		IP65/IK08	
Warranty		5 years	
Way to install		Pole/ Post Top	
Application		Highway/park/parkinglot/community/factory/yard/stadium/school	