

AREA LIGHTS



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION


Die Cast Aluminum ;
UV Resistant PC Lens.

OPTION


Available for installing with sensor (*review details on spec sheet);

APPLICATIONS

Highway/park/parkinglot/community/factory/yard/stadium/school

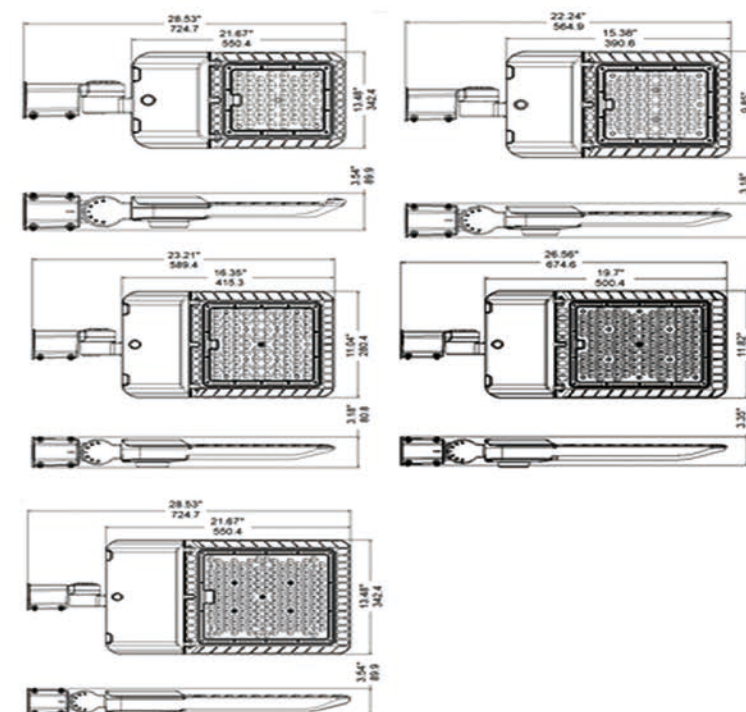

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

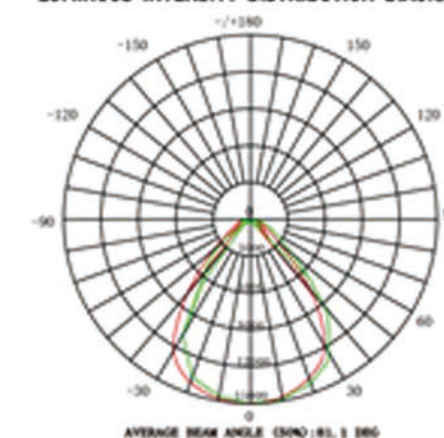

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EG-004C-100-3CCT	28.53"x13.48"x3.54"	70/80/100W	10500-15000Lm	120	90°	3500/ 4000/ 5000K	>70	/
	EG-005C-150-3CCT	22.24"x9.85"x3.18"	100/120/150W	15000-22500Lm					
	EG-006C-200-3CCT	28.53"x13.48"x3.54"	120/150/200W	18000-30000Lm					
	EG-006C-200-3CCT	28.53"x13.48"x3.54"	200/250/300W	18000-30000Lm					
	EG-006C-200-3CCT	28.53"x13.48"x3.54"	300/350/400W	18000-30000Lm					