



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
LED SMD 2835/3030;
Nominal Size: 2X2、1X4、2X4.

SPECIFICATION

Aluminum frame, sheet metal housing;
High-diffusion light-milky PS diffuser;
Fully recessed luminaire fits standard T-Grid ceilings.


OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Photocatalyst version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital

LED PANEL

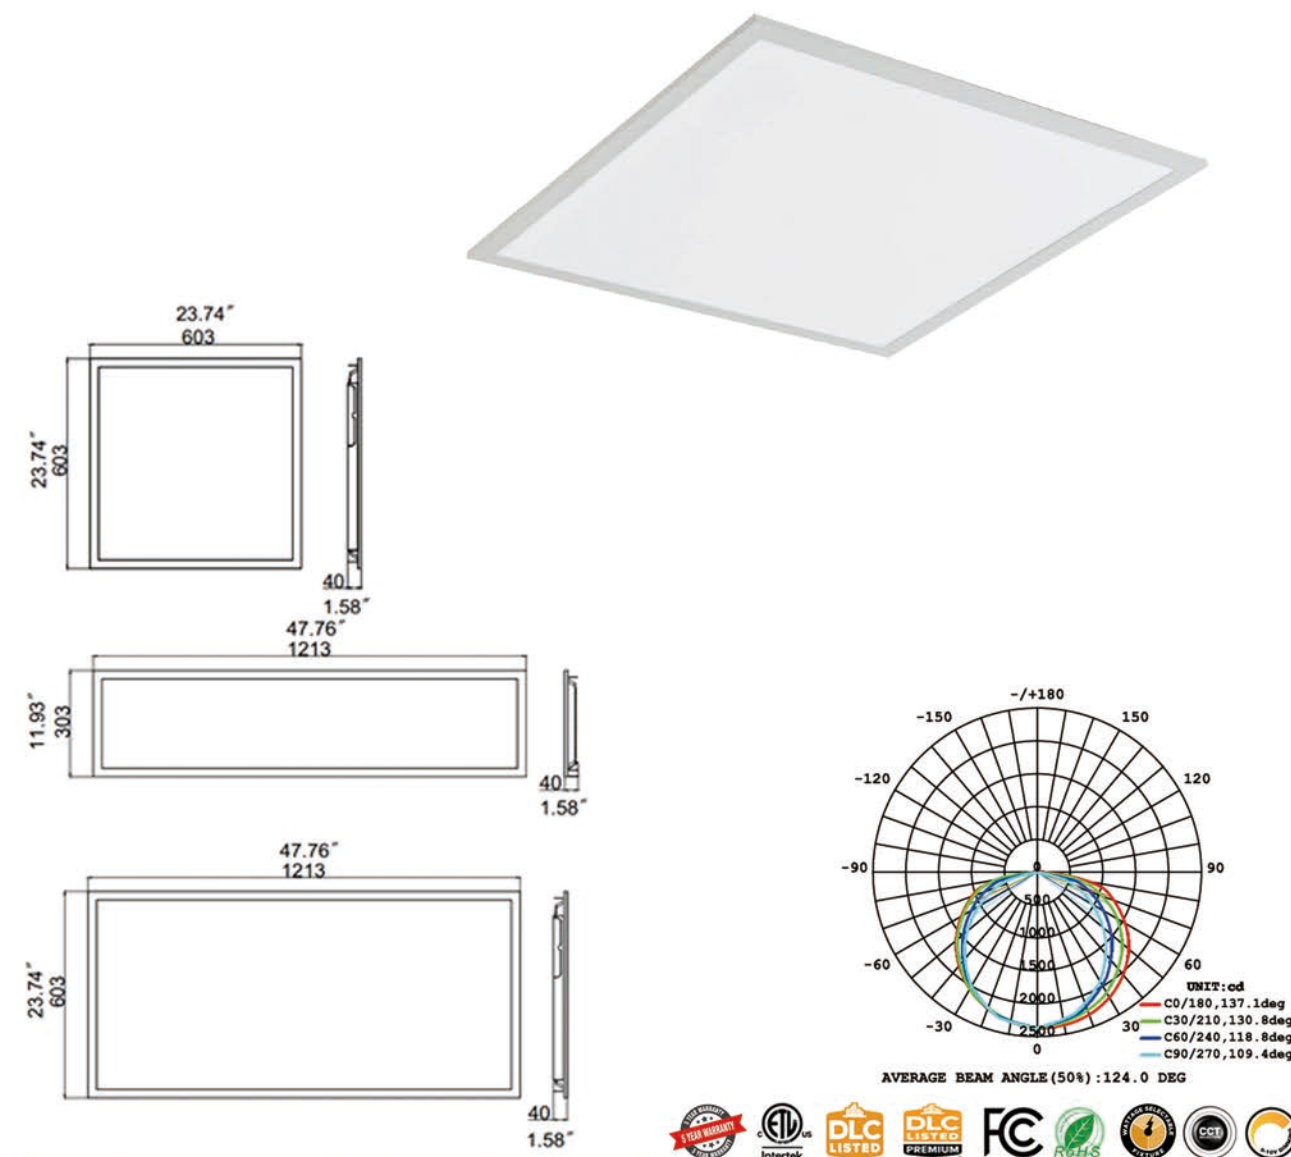

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMMABLE	FUNCTION
VP1	EY-001C-040-3CCT	2x2	20/30/40W	2200-4400Lm	110	110°	3500K-4000K-5000K	>80	0-10V	/
	EY-002C-040-3CCT	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT	2x4	30/40/50W	3300-5500Lm	110					
VP2	EY-001C-040-3CCT-P	2x2	20/30/40W	2200-4400Lm	110					Radar/microwave/infrared sensing
	EY-002C-040-3CCT-P	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT-P	2x4	30/40/50W	3300-5500Lm	110					
VP3	EY-001C-040-3CCT-H	2x2	20/30/40W	3300-6600Lm	150					High efficiency
	EY-002C-040-3CCT-H	1x4	20/30/40W	3300-6600Lm	150					
	EY-003C-050-3CCT-H	2x4	30/40/50W	4950-8250Lm	150					
VP4	EY-001C-040-3CCT-C	2x2	20/30/40W	2200-4400Lm	110					Photocatalyst
	EY-002C-040-3CCT-C	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT-C	2x4	30/40/50W	3300-5500Lm	110					
VP5	EY-001C-040-3CCT-S	2x2	20/30/40W	2200-4400Lm	110		3500-5000k	>90	APPS	Intelligent interconnection
	EY-002C-040-3CCT-S	1x4	20/30/40W	2200-4400Lm	110					
	EY-003C-050-3CCT-S	2x4	30/40/50W	3300-5500Lm	110					