

LED FLOOD LIGHTS



PRODUCT DESCRIPTION


LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION


Die-cast Aluminum;
UV Resistant PC Lens;
Tempered Glass.

APPLICATIONS

Facade/Wall washing/Landscape lighting;
Building lighting/Sign lighting/
Commercial lighting

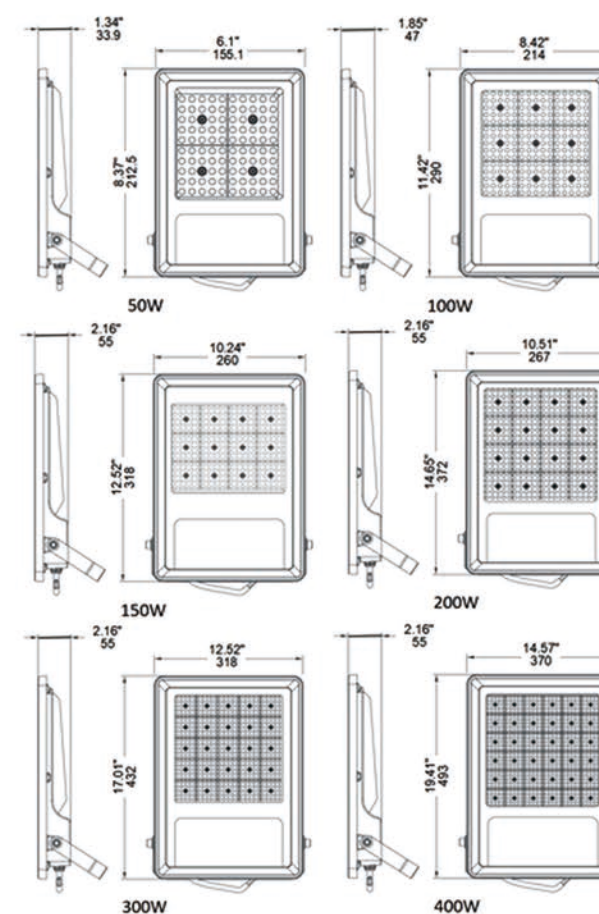

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

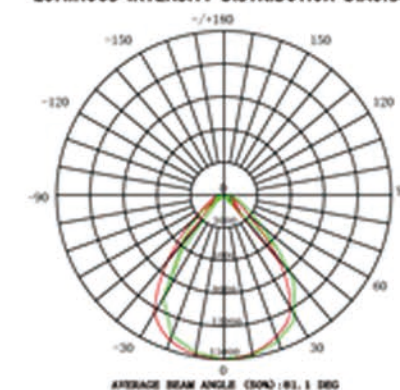

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EF-001C-050-7**	8.37"*6.1"*1.34"	50W	5500Lm	110	90°	4000/ 5000/ 6500K	>70	/
	EF-002C-100-7**	11.42"*8.42"*2.16"	100W	11000Lm					
	EF-003C-150-7**	12.52"*10.24"*2.16"	150W	16500Lm					
	EF-004C-200-7**	14.65"*10.51"*2.16"	200W	22000Lm					
	EF-005C-300-7**	17.01"*12.52"*2.16"	300W	33000Lm					
	EF-006C-400-7**	19.41"*14.57"*2.16"	400W	44000Lm					