



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
0-10V dimming;
LED SMD 2835/3030;
Nominal Size: 4FT/8FT.

SPECIFICATION

Metal frame;
High-diffusion light-milky PC ;
Damp location rated for indoor use.


OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital

LED LINEAR STRIP

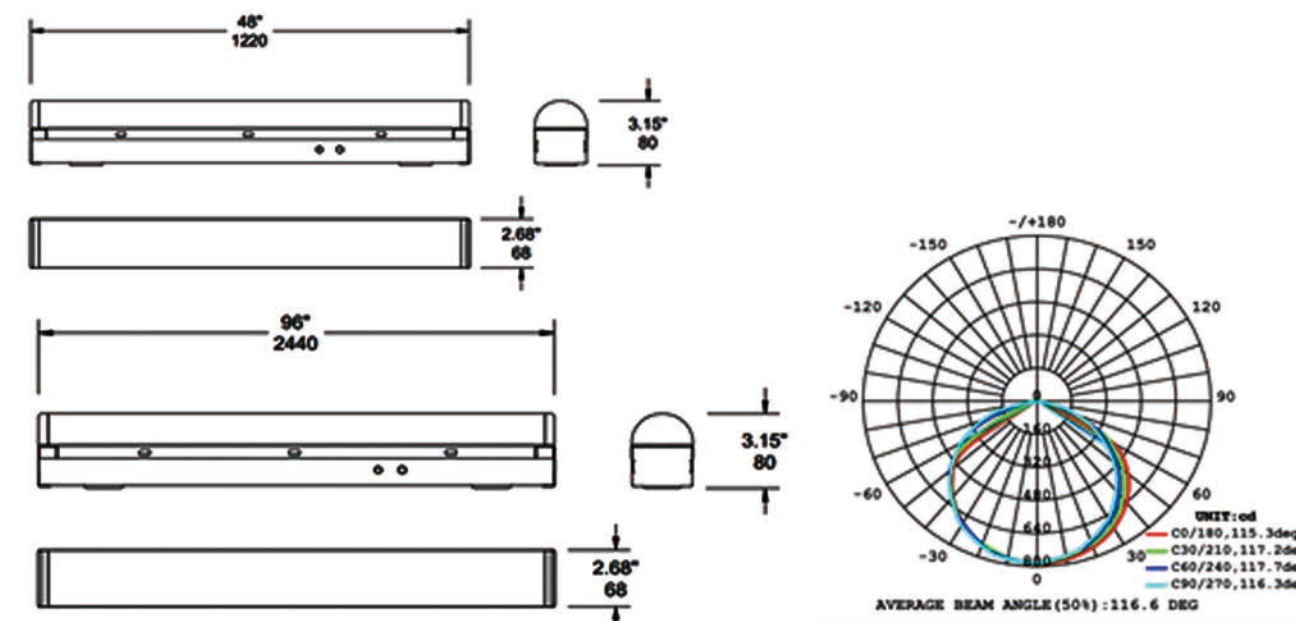

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION
VP1	EE-002C-047-3CCT	4ft	25/30/40W	3250-5200Lm	130	120°	3500/ 4000/ 5000K	>80	0-10V	/
	EE-003C-047-3CCT	8ft	50/65/85W	6500-11050Lm						
VP2	EE-002C-047-3CCT-P	4ft	25/30/40W	3250-5200Lm						Radar/microwave infrared sensing
	EE-003C-047-3CCT-P	8ft	50/65/85W	6500-11050Lm						
VP3	EE-002C-047-3CCT-S	4ft	25/30/40W	3250-5200Lm			3500-5000k	>90	APPS	Intelligent interconnection
	EE-003C-047-3CCT-S	8ft	50/65/85W	6500-11050Lm						