



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION

Die-cast Aluminum;
Tempered Glass.




OPTION

Available for installing with sensor (*review details on spec sheet);

APPLICATIONS

Highway/park/parkinglot/community/factory/yard/stadium/school

LED PARKING LOT LIGHT

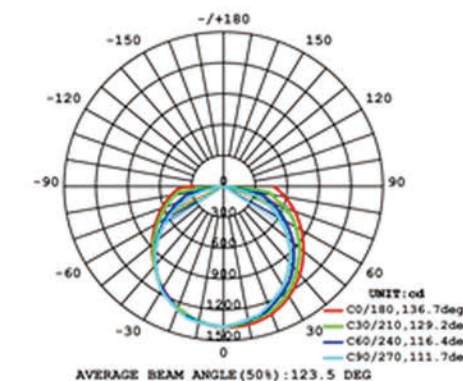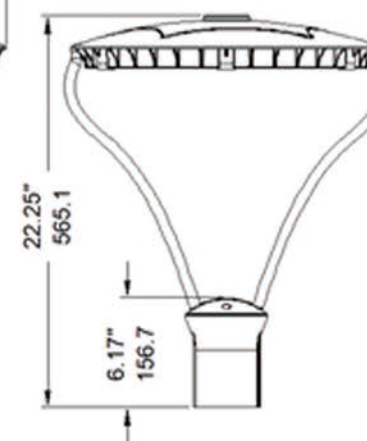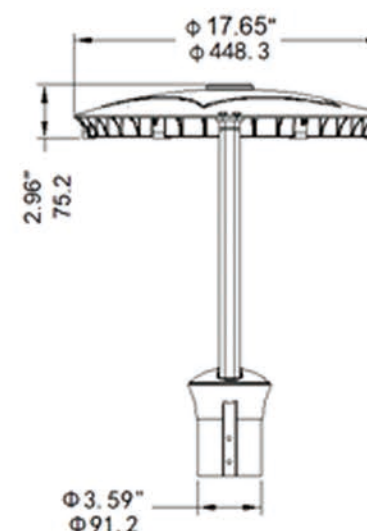

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EP-001B-050-7**	ø17.65"x22.25"	50W	5250Lm	105	120°	3500/ 4000/ 5000K	>70	/
	EP-002B-100-7**	ø17.65"x22.25"	100W	10500Lm					
VP2	EP-001B-050-7**-P	ø17.65"x22.25"	50W	5250Lm	105	120°	3500/ 4000/ 5000K	>70	(photocell on/off)
	EP-002B-100-7**-P	ø17.65"x22.25"	100W	10500Lm					