

LED TROFFER



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
LED SMD 2835/3030;
Nominal Size: 2X2、2X4.

SPECIFICATION


Sheet metal housing;
High-diffusion light-milky PS diffuser;
Fully recessed luminaire fits standard T-Grid ceilings.

OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital

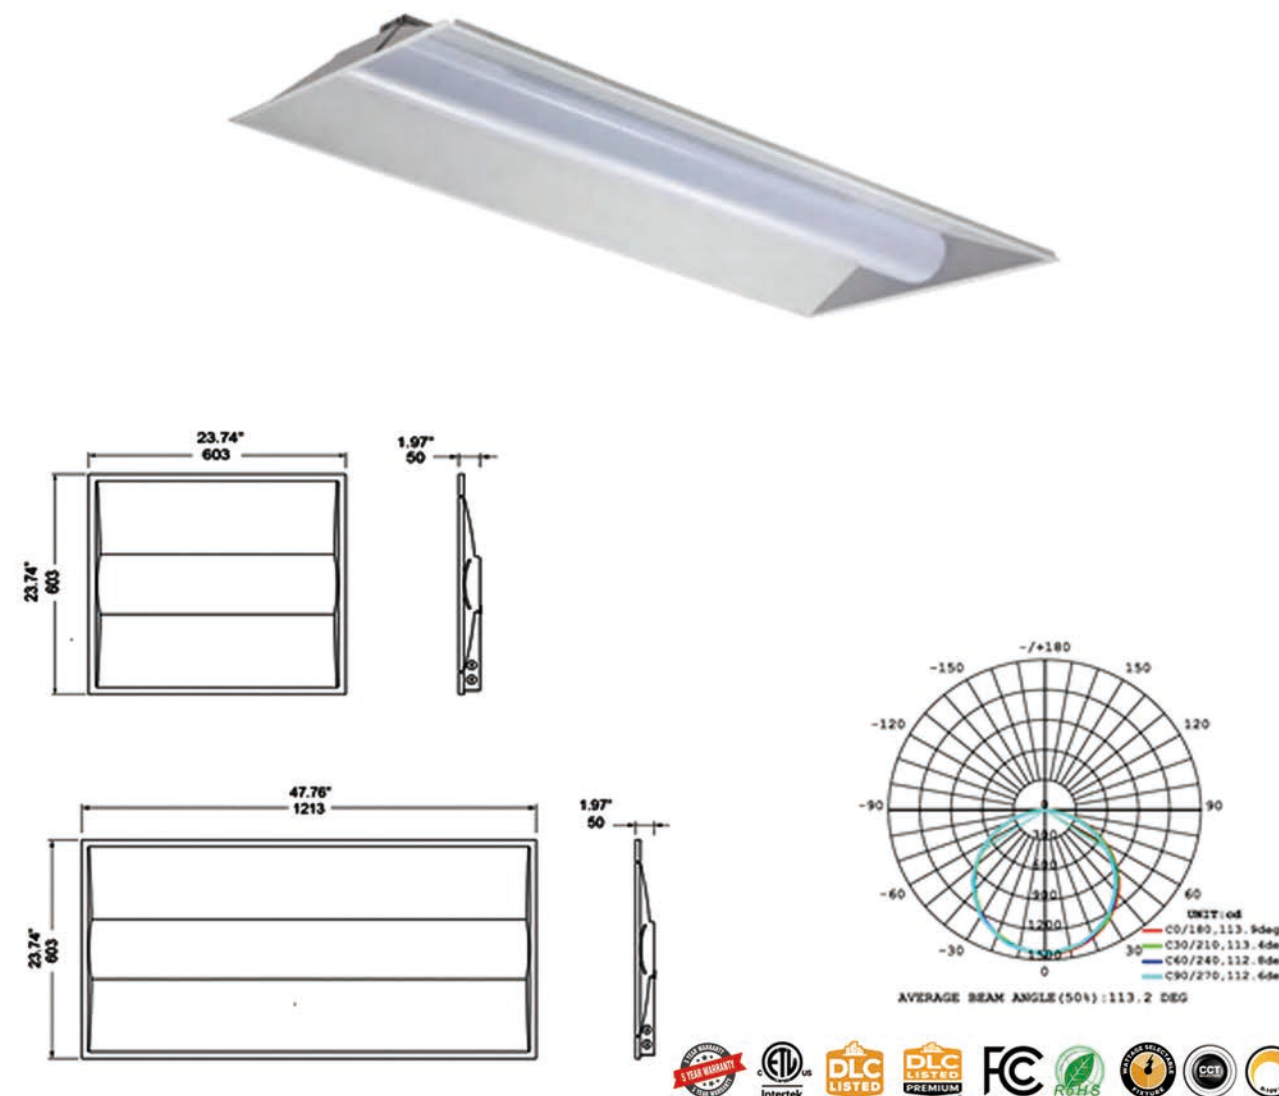

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION
VP1	EY-004C-040-5CCT	2x2	20/25/30/ 35/40W	2500-5000Lm	125	110°	3500/ 4000/ 4500/ 5000/ 6000K	>80	0-10V	/
	EY-005C-060-5CCT	2x4	30/35/40/ 50/60W	3750-7500Lm	125					
VP2	EY-004C-040-5CCT-P	2x2	20/25/30/ 35/40W	2500-5000Lm	125					Radar/microwa ve/infrared sensing
	EY-005C-060-5CCT-P	2x4	30/35/40/ 50/60W	3750-7500Lm	125					
VP3	EY-004C-040-5CCT-H	2x2	20/25/30/ 35/40W	3400-6800Lm	150					High efficiency
	EY-005C-060-5CCT-H	2x4	30/35/40/ 50/60W	5100-10200Lm	150					
VP4	EY-004C-040-5CCT-S	2x2	20/25/30/ 35/40W	2500-5000Lm	125		3500-5000k	>90	APPS	Intelligent interconnection
	EY-005C-060-5CCT-S	2x4	30/35/40/ 50/60W	3750-7500Lm	125					