





LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
0-10V dimming;
LED SMD 2835/3030;
Nominal Size: 2FT/4FT;

Metal frame,
High-diffusion light-milky PC
Damp location rated for indoor use

Available for installing with sensor (*review details on spec sheet)
High efficiency version available
Intelligent interconnection version available

Shop/School/Office/Hotel/Conference/Room/Hospital

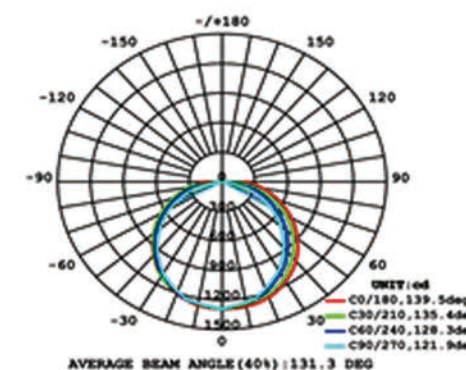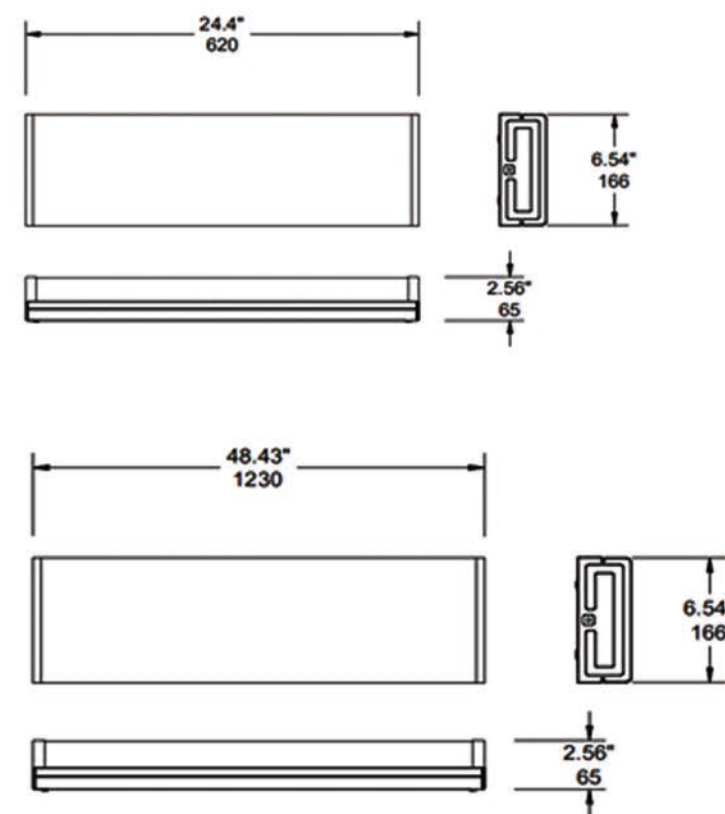

LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	DIMM ABLE	FUNCTION				
VP1	EE-004C-030-3CCT	2FT	20/25/30W	2600-3900Lm	130	120°	3500/ 4000/ 5000K	>80	0-10V	/ Radar/microwav infrared sensin				
	EE-005C-048-3CCT	4FT	23/35/48W	2990-6240Lm	130									
VP2	EE-004C-030-3CCT-P	2FT	20/25/30W	2600-3900Lm	130		3500-5000K	>90	APPS	Intelligent interconnection				
	EE-005C-048-3CCT-P	4FT	23/35/48W	2990-6240Lm	130									
VP3	EE-004C-030-3CCT-S	2FT	20/25/30W	2600-3900Lm	130									
	EE-005C-048-3CCT-S	4FT	23/35/48W	2990-6240Lm	130									