




LED VAPOR TIGHT

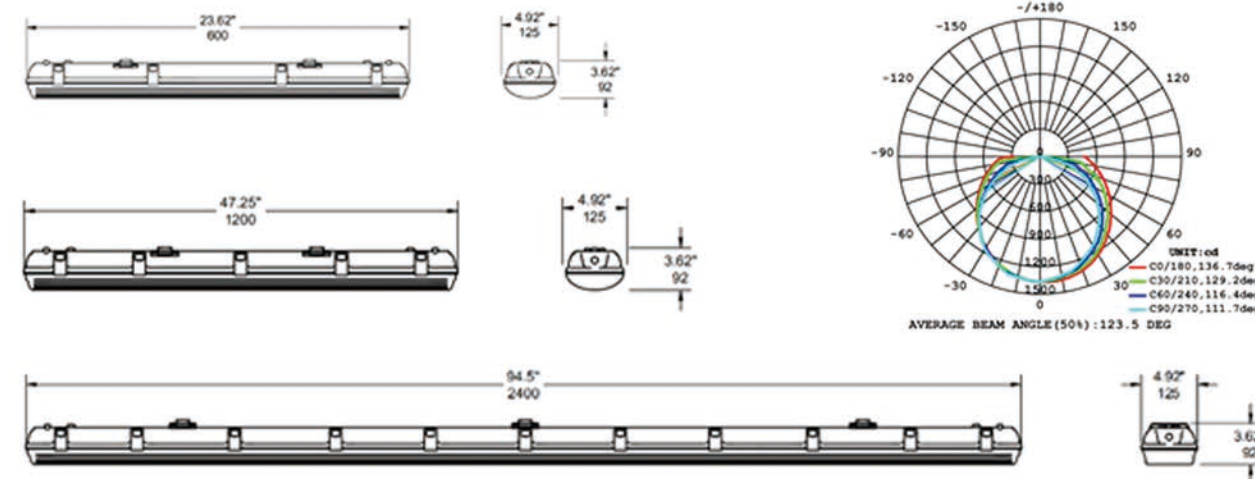

PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
CCT and Wattage Selectable;
IP65 and IK08 Rated;
LED SMD 2835/3030;
Nominal Size: 2FT/4FT/8FT.

SPECIFICATION

Metal frame;
High-diffusion light-milky PC;
Damp location rated for indoor use.

OPTION

Available for installing with sensor (*review details on spec sheet);
High efficiency version available;
Intelligent interconnection version available.

APPLICATIONS

Shop/School/Office/Hotel/Conference/Room/Hospital



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW(Lm/W)	BEAM ANGLE	CCT	CRI	DIMMABLE	FUNCTION
VP1	EF-001C-024-3CCT	2FT	16/20/24W	2080-3120Lm	130	120°	3500K-4000K-5000K	>80	0-10V	Radar/microwave/infrared sensing
	EF-002C-050-3CCT	4FT	32/44/50W	4160-6500Lm	130					
	EF-003C-120-3CCT	8FT	80/100/120W	10400-15600Lm	130					
VP2	EF-001C-024-3CCT-P	2FT	16/20/24W	2080-3120Lm	130		3500-5000k	>90	APPS	Intelligent interconnection
	EF-002C-050-3CCT-P	4FT	32/44/50W	4160-6500Lm	130					
	EF-003C-120-3CCT-P	8FT	80/100/120W	10400-15600Lm	130					
VP3	EF-001C-024-3CCT-S	2FT	16/20/24W	2080-3120Lm	130					
	EF-002C-050-3CCT-S	4FT	32/44/50W	4160-6500Lm	130					
	EF-003C-120-3CCT-S	8FT	80/100/120W	10400-15600Lm	130					