

WALL LUMINAIRES



PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION



Aluminum Housing ;
UV Resistant PC Lens.

OPTION

Available for installing with sensor (*review details on spec sheet);

APPLICATIONS

Garages/Building lighting/Packing lot lighting/Entryway/Storage warehouses/Security lighting

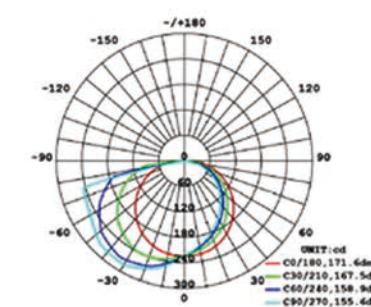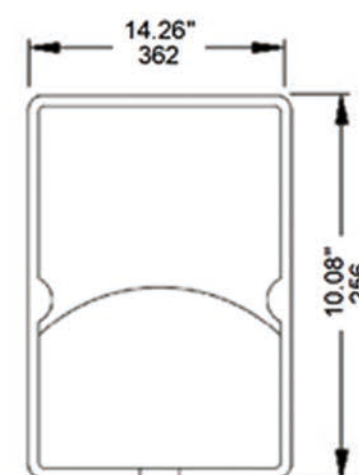

AVERAGE BEAM ANGLE (10%): 163.4 DEG



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EL-004B-030-7**	10.08"x14.26"x14.26"	30W	3150Lm	105	110°	3000/ 4000/ 5000/ 5700K	>70	/
VP1	EL-004B-030-7**	10.08"x14.26"x14.26"	30W	3150Lm	105	100°	3000/ 4000/ 5000/ 5700K	>70	(photocell on/off)