
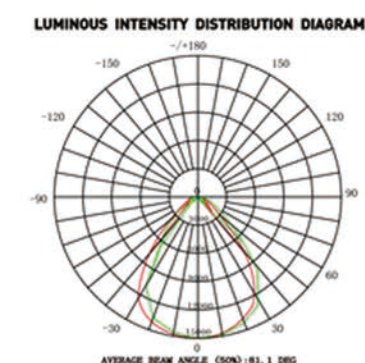
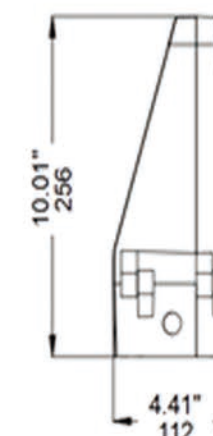


WALL LUMINAIRES

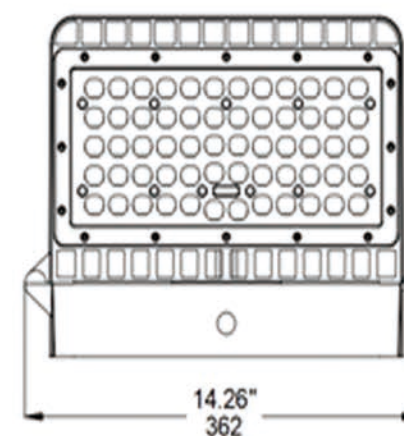

PRODUCT DESCRIPTION

LED driver for 120V-277V/60Hz;
IP65 Rated- Perfect for outdoor applications;
LED SMD 2835/3030.

SPECIFICATION

Die Cast Aluminum ;
UV Resistant PC Lens.

OPTION

Available for installing with sensor (*review details on spec sheet);

APPLICATIONS

Garages/Building lighting/Packing lot
lighting/Entryway/Storage warehouses/Security lighting



LOCATION	MODEL	SIZE	WATTS	LUMEN	LPW (Lm/W)	BEAM ANGLE	CCT	CRI	FUNCTION
VP1	EL-0045B-030-7**	10.08"x14.26"x14.26"	30W	3150Lm	105	90°	3000/ 4000/ 5000/ 5700K	>70	/
VP2	EL-0045B-030-7**-P	10.08"x14.26"x14.26"	30W	3150Lm					(photocell on/off)